


VC1206K201R017

General Information

VC, Varistors, Low Voltage, 22 V, 17 VAC, 27 V, 44 V, 1 A, 200 A, 700 mJ, 8000 uW $\,$

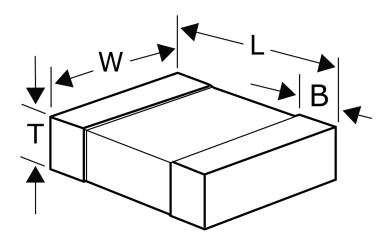

Series VC Туре Varistors Style SMD Chip Description Surface Mount Varistors Features Low Voltage Termination Nickel Tin RoHS Yes Qualifications IEC, UL, AEC-Q200 AEC-Q200 Yes

Specifications	,
Voltage DC	22 VDC (25C)
Voltage AC	17 VAC
Temperature Range	-55/+125°C
Storage Temperature Range	-55/+150°C
Varistor Voltage	27 VDC at 1 mA
Clamping Voltage	44 V
Clamping Current	1A (8/20 us MAX)
Surge Current	200 A (8/20 us MAX)
Energy	0.7 J (10/1000 us MAX)
Capacitance	740 pF (1kHz)

Click here for the 3D model.

Dimensions	
Chip Size	1206
L	3.2mm +/-0.3mm
W	1.6mm +/-0.2mm
Т	1.25mm MAX
В	0.5mm +/-0.25mm

Packaging Specifications

551	
Packaging	T&R
Packaging Quantity	2500

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

单击下面可查看定价,库存,交付和生命周期等信息

>>KEMET(基美)