


TSM, Tantalum, MnO2 Tantalum, HRA, 60 uF, 10%, 35 VDC, 6C

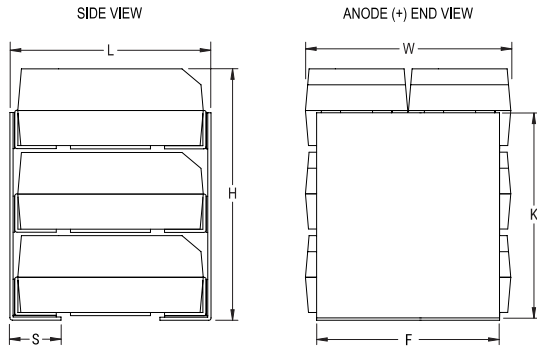

Dimensions	
Case Code	6C
L	6.5mm +/-0.38mm
W	6.6mm +/-0.2mm
H	7.8mm +/-0.38mm
S	1.4mm +/-0.38mm
F	5.8mm +/-0.2mm
K	6.6mm +/-0.38mm

Packaging Specifications	
Packaging:	Tray
Packaging Quantity:	50

General Information	
Series:	TSM
Dielectric:	MnO2 Tantalum
Style:	Stacked Chip
Description:	SMD, MnO2, Stacks, High Reliability
Features:	High Reliability
RoHS:	No
Prop 65:	<b>WARNING:</b> Cancer and reproductive harm - <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>
SCIP Number:	caad73ff-76df-4134-900f-f7fcd125e1c
Termination:	Hot Solder Dipped
AEC-Q200:	No
MSL:	1

Specifications	
Capacitance:	60 uF
Capacitance Tolerance:	10%
Voltage DC:	35 VDC (85C), 23.45 VDC (125C)
Temperature Range:	-55/+125°C
Rated Temperature:	85°C
Dissipation Factor:	6% 120Hz 25C
Failure Rate:	B (0.1%/1000 Hrs)
Resistance:	0.2 Ohms (100kHz 25C)
Leakage Current:	21 uA (5min 25°C)
Testing and Reliability:	Standard Testing Only

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)