


KEMET Part Number: PHE840MF7120JF03R06L2
(F840FK125J275C)

PHE840M/F840, Film, Metallized Polypropylene, Safety, 1.2 uF, 5%, 275 VAC (X2), 760 VDC, 105°C, Lead Spacing = 27.5mm

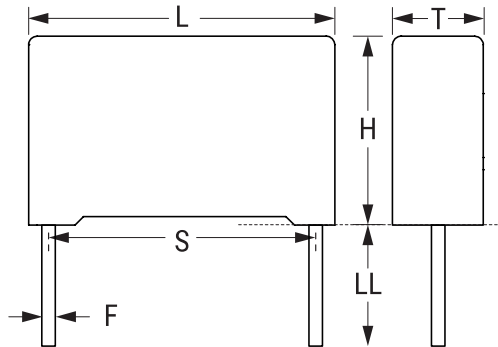

Dimensions

L	31.5mm MAX
H	23mm MAX
T	13.5mm MAX
S	27.5mm +/-0.4mm
LL	6mm NOM
F	0.8mm NOM

Packaging Specifications

Packaging:	Tray
Packaging Quantity:	171

General Information

Series:	PHE840M/F840
Dielectric:	Metallized Polypropylene
Style:	Radial
Features:	EMI Safety
RoHS:	Yes
Lead:	Wire Leads
Safety Class:	X2
Qualifications:	ENEC, UL, cUL
AEC-Q200:	No
THB Performance:	No
Notes:	Not For New Design, Please Check Possible Alternative Parts (AltPart).

Specifications

Capacitance:	1.2 uF
Capacitance Tolerance:	5%
Voltage AC:	275 VAC (X2)
Voltage DC:	760 VDC
Temperature Range:	-55/+105°C
Rated Temperature:	105°C
Dissipation Factor:	0.1% 1kHz, 0.8% 10kHz
Insulation Resistance:	8.3333 GOhms
Max dV/dt:	100 V/us

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)