


TEPSLB150J157M(70)8R

Aliases (PSLB150J157M(70)8R-T&R)

PS/L, Tantalum, Polymer Tantalum, 150 uF, 20%, 6.3 VDC, SMD, Molded, Polymer, Low Profile, Low ESR, 70 mOhms, 3528, Height Max = 1.5mm

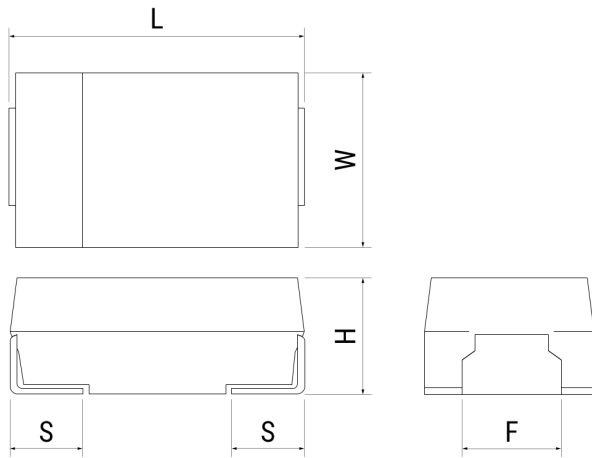

Click [here](#) for the 3D model.

Dimensions

Footprint	3528
L	3.5mm +/-0.2mm
W	2.8mm +/-0.2mm
H	1.4mm +/-0.1mm
S	0.8mm +/-0.2mm
F	2.2mm +/-0.1mm

Packaging Specifications

Packaging T&R, 178mm

General Information

Series	PS/L
Dielectric	Polymer Tantalum
Style	SMD Chip
Description	SMD, Molded, Polymer, Low Profile, Low ESR
Features	Low Profile, Low ESR
RoHS	Yes
Termination	Tin
AEC-Q200	No

Specifications

Capacitance	150 uF
Capacitance Tolerance	20%
Voltage DC	6.3 VDC (105°C), 8.2 VDC (Surge)
Temperature Range	-55/+105°C
Rated Temperature	105°C
Dissipation Factor	10%
Failure Rate	N/A
Resistance	70 mOhms (25C, 100kHz)
Ripple Current	1069 mAmps (25C, 100kHz)
Leakage Current	94.5 uA

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)