


**KEMET Part Number: ALS71A822QC250**  
(A490UE822M250A)

ALS71, Aluminum Electrolytic, 8,200 uF, 20%, 250 VDC, -40/+85°C

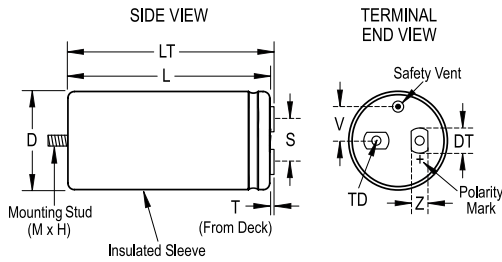

Dimensions	
D	90mm +/-1mm
L	67mm +/-2mm
T	5.5mm +/-0.5mm
S	31.8mm +/-0.5mm
DT	13mm +/-0.5mm
LT	71.5mm +/-1mm
TD	10mm MIN
V	25mm NOM
Z	10mm NOM

Packaging Specifications	
Sleeving:	Yes
Packaging:	Tray

General Information	
Series:	ALS71
Dielectric:	Aluminum Electrolytic
Description:	Screw Terminal, Aluminum Electrolytic
RoHS:	Yes
Mounting:	Stud
AEC-Q200:	No
Halogen Free:	Yes
Component Weight:	615 g
Notes:	Dimensions D And L Include Sleeving. MS (MxH) = M12x16. Mounting Clamp (Sold Separately): V90N
Shelf Life:	156 Weeks

Specifications	
Capacitance:	8,200 uF
Capacitance Tolerance:	20%
Voltage DC:	250 VDC, 288 VDC (Surge)
Temperature Range:	-40/+85°C
Rated Temperature:	85°C
Life:	20000 Hrs (Rated Voltage And Ripple Current At 85C), 40000 Hrs (Rated Voltage At 85C)
Resistance:	41 mOhms (100Hz 20C), 30 mOhms (10kHz 20C)
Ripple Current:	13.9 Amps (100Hz 85C), 18.1 Amps (10kHz 85C)
Leakage Current:	6000 uA

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)