


## FME0H223ZFTP18

Aliases (USCFME0H223ZTB)

FME, Supercapacitors, Radial Molded, 0.022 F, -20/+80%, 5.5 VDC, Wire Leads, Lead Spacing = 5mm

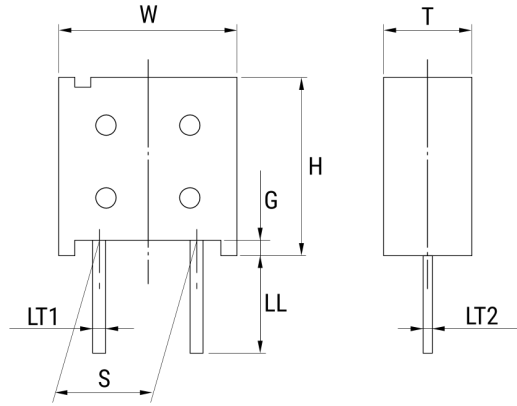

Click [here](#) for the 3D model.

### Dimensions

W	10.5mm +/-0.5mm
H	11.5mm +/-0.5mm
T	5mm +/-0.5mm
S	5mm +/-0.5mm
LL	18mm +/-1mm
G	0.4mm +/-0.1mm
LT1	0.5mm +/-0.1mm
LT2	0.4mm +/-0.1mm

### Packaging Specifications

Lead	Wire Leads
Packaging	Ammo
Packaging Quantity	1000

### General Information

Series	FME
Description	Radial Molded Double Layer Capacitor
RoHS	Yes
AEC-Q200	No
Component Weight	1.3 g
Miscellaneous	DischargeValue = 0.028 F.

### Specifications

Capacitance	0.022 F
Capacitance Tolerance	-20/+80%
Voltage DC	5.5 VDC
Temperature Range	-25/+70°C
Rated Temperature	70°C
Resistance	40000 mOhms (1kHz)
Discharge Current	0.033 mAmps (30 Minutes After Charging)

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)