


R76IR415050HLJ

Aliases (76IR415050HLJ)

R76H, Film, Double Metallized Polypropylene, Automotive Grade, 1.5 uF, 5%, 250 VDC, 105°C, Lead Spacing = 27.5mm

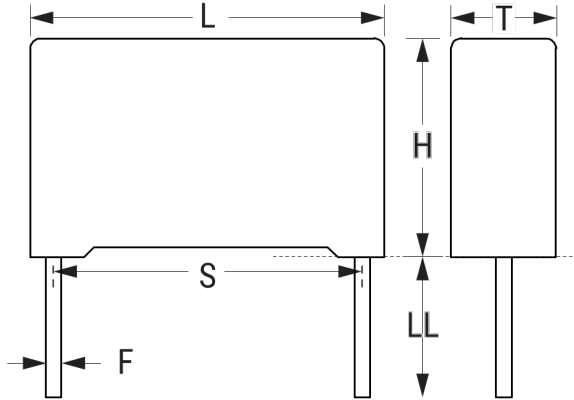

Click [here](#) for the 3D model.

Dimensions

| | |
|----|------------------|
| L | 32mm +0.3/-0.7mm |
| H | 15mm +0.1/-0.7mm |
| T | 24mm +0.2/-0.7mm |
| S | 27.5mm +/-0.4mm |
| LL | 25mm +2/-1mm |
| F | 0.8mm +/-0.05mm |

Packaging Specifications

| | |
|--------------------|------|
| Packaging | Tray |
| Packaging Quantity | 144 |

General Information

| | |
|------------------|---------------------------------|
| Series | R76H |
| Dielectric | Double Metallized Polypropylene |
| Style | Radial |
| Features | Automotive Grade, Pulse |
| RoHS | Yes |
| Lead | Wire Leads |
| Qualifications | AEC-Q200 |
| AEC-Q200 | Yes |
| THB Performance | Yes |
| Component Weight | 14.2 g |

Specifications

| | |
|-----------------------|---|
| Capacitance | 1.5 uF |
| Capacitance Tolerance | 5% |
| Voltage AC | 180 VAC |
| Voltage DC | 250 VDC |
| Temperature Range | -55/+125°C |
| Rated Temperature | 105°C |
| Dissipation Factor | 0.04% 1kHz |
| Insulation Resistance | 20 GOhms |
| Max dV/dt | 200 V/us |
| Resistance | 4.24 mOhms (100kHz) |
| Ripple Current | 11.56 Amps (100kHz 100C), 300 Amps (Peak) |
| Inductance | 18 nH |

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)