


VP4032K122R230

VP, Varistors, Plastic Encapsulated, 300 V, 230 VAC, 360 V, 595 V, 10 A, 1.2 kA, 23 J, 250 mW $\,$

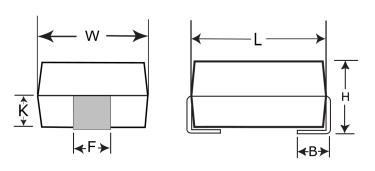

General Information	
Series	VP
Туре	Varistors
Style	SMD Molded
Description	Surface Mount Varistors
Features	Plastic Encapsulated
Termination	Nickel Tin
RoHS	Yes
Qualifications	UL
AEC-Q200	No

300 VDC (25C)

Dimensions	
Chip Size	4032
L	10mm +/-0.5mm
W	8mm +/-0.4mm
Н	4.7mm +/-0.3mm
F	3mm +/-0.3mm
В	1.5mm +/-0.3mm
K	2.3mm +/-0.3mm

Click here for the 3D model.		Voltage AC	230 VAC
		Temperature Range	-40/+85°C
		Storage Temperature Range	-40/+125°C
Dimensions		Varistor Voltage	360 VDC at 1 mA
Chip Size	4032	Clamping Voltage	595 V
L	10mm +/-0.5mm	Clamping Current	10 A (8/20 us MAX)
W	8mm +/-0.4mm	Surge Current	1200 A (8/20 us MAX)
Н	4.7mm +/-0.3mm	Energy	23 J (10/1000 us MAX)
F	3mm +/-0.3mm	Capacitance	190 pf (1kHz)
В	1.5mm +/-0.3mm		

Specifications Voltage DC

Packaging Specifications	,
Packaging	T&R
Packaging Quantity	1000

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

单击下面可查看定价,库存,交付和生命周期等信息

>>KEMET(基美)