


ACA16B821KGS

ACA Indust COG HT200C, Ceramic, 820 pF, 10%, 50 VDC, COG, ACA Indust COG HT200C with C3 Technology, Axial

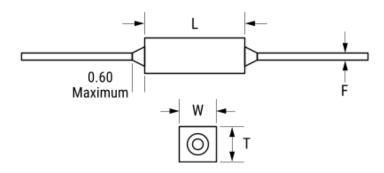

General Information		
Series	ACA Indust COG HT200C	
Description	ACA Indust COG HT200C with C3 Technology, Axial	
Features	High Temperature	
RoHS	No	
Prop 65	A WARNING: Cancer and reproductive harm - http://www.p65warnings.ca.gov.	
Termination	Gold	
AEC-Q200	No	
Shelf Life	72 Weeks	

Specifications		
Capacitance	820 pF	
Capacitance Tolerance	10%	
Voltage DC	50 VDC	
Dielectric Withstanding Voltage	75 VDC	
Temperature Range	-55/+200°C	
Temperature Coefficient	COG	
Capacitance Change with Reference to +25°C and 0 VDC Applied (TCC)	30 ppm/C,1kHz 1.0Vrms	
Dissipation Factor	0.15% 1 kHz 1.0Vrms	
Insulation Resistance	100 GOhms	

Dimensions	
L 4.32mm MAX	
W 2.03mm MAX	
T 2.03mm MAX	
LL 3.175mm MIN	
F 0.508mm +/-0.051mm	

Packaging Specifications		
Packaging	Waffle	
Packaging Quantity	25	

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

单击下面可查看定价,库存,交付和生命周期等信息

>>KEMET(基美)