


A769KE187M1ELAS025

A769, Polymer Aluminum, 180 uF, 20%, 25 VDC, -55/+125°C



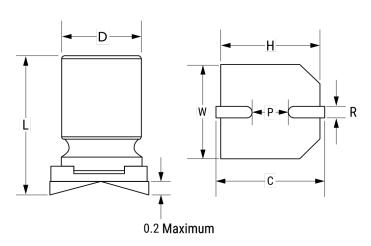

Click here for the 3D model.

Dimensions	
D	8mm +/-0.5mm
L	6.7mm +/-0.3mm
W	8.3mm +/-0.2mm
Н	8.3mm +/-0.2mm
С	9mm +/-0.2mm
Р	3.1mm NOM
R	0.8 - 1.1mm

Packaging Specifications	
Packaging	T&R, 380mm
Packaging Quantity	1000

General Information		
Series	A769	
Dielectric	Polymer Aluminum	
Style	SMD Can	
Description	Surface Mount, Polymer Aluminum	
RoHS	Yes	
Lead	V-Chip	
Qualifications	AEC-Q200	
AEC-Q200	Yes	
Halogen Free	Yes	

Specifications				
Capacitance	180 uF			
Capacitance Tolerance	20%			
Temperature Range	-55/+125°C			
Rated Temperature	125°C			
Life	2000 Hrs			
Resistance	25 mOhms (100kHz 20C)			
Ripple Current	1840 mAmps (100kHz 125C)			
Leakage Current	900 uA (2min 20°C)			
High Temperature Solder	Yes			

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

单击下面可查看定价,库存,交付和生命周期等信息

>>KEMET(基美)