


T353K106K050AT7301

Aliases (T353K106K050ATTR)

T353, Tantalum, MnO₂ Tantalum, Commercial Grade, 10 uF, 10%, 50 VDC, Radial, Solid Tantalum, Conformal, Dipped, Lead Spacing = 5.08mm

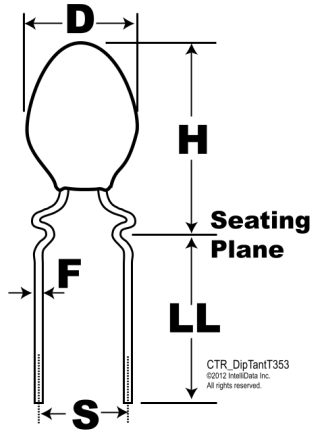

Click [here](#) for the 3D model.

Dimensions

D	8.9mm
H	16mm
S	5.08mm +/-0.38mm
LL	4.75mm +/-0.81mm
F	0.5mm +/-0.05mm

Packaging Specifications

Packaging	T&R, 305mm
Packaging Quantity	500

General Information

Series	T353
Dielectric	MnO ₂ Tantalum
Style	Radial
Description	Radial, Solid Tantalum, Conformal, Dipped
Features	Low Leakage
RoHS	Yes
Termination	Tin
AEC-Q200	No
Notes	Longest Lead Is Positive.

Specifications

Capacitance	10 uF
Capacitance Tolerance	10%
Voltage DC	50 VDC (85C), 33 VDC (125C), 0.5 VDC (125C Reverse)
Temperature Range	-55/+125°C
Dissipation Factor	6%
Leakage Current	4 uA

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)