


PME261JB5100KR30

Aliases (P561QE103K500A)

PME261/P561, Film, Metallized Paper, General Purpose, 0.01 uF, 10%, 1000 VDC, 85°C, Lead Spacing = 15.2mm

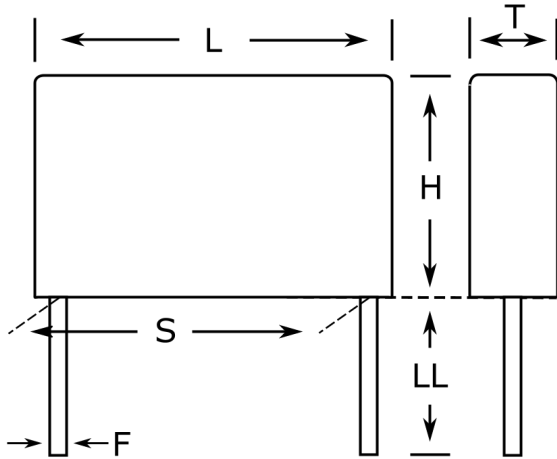

Click [here](#) for the 3D model.

Dimensions

L	18.5mm -0.5mm
H	10.5mm -0.5mm
T	5.2mm -0.5mm
S	15.2mm +/-0.4mm
LL	30mm +5mm
F	0.8mm +/-0.05mm

Packaging Specifications

Packaging	Bulk, Bag
Packaging Quantity	500

General Information

Series	PME261/P561
Dielectric	Metallized Paper
Style	Radial
Features	Pulse in DC and low frequency applications
RoHS	Yes
Lead	Wire Leads
AEC-Q200	No
Construction	Molded
Component Weight	1.53 g
Miscellaneous	AC Operation: 70C MAX.

Specifications

Capacitance	0.01 uF
Capacitance Tolerance	10%
Voltage AC	500 VAC
Voltage DC	1000 VDC
Temperature Range	-40/+100°C
Rated Temperature	85°C
Dissipation Factor	1.3% 1kHz
Insulation Resistance	12 GOhms
Max dV/dt	2000 V/us

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)