


R75H, Film, Metallized Polypropylene, Automotive Grade, 0.15 uF, 20%, 1000 VDC, 105°C, Lead Spacing = 27.5mm

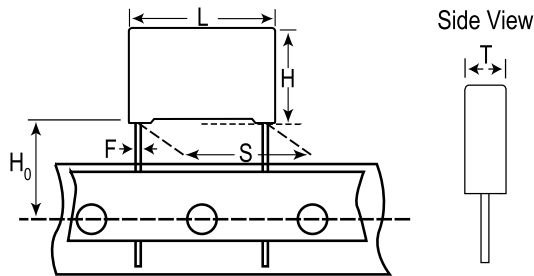

General Information	
Series:	R75H
Dielectric:	Metallized Polypropylene
Style:	Radial
Features:	Automotive Grade, Pulse
RoHS:	Yes
Lead:	Wire Leads
Qualifications:	AEC-Q200
AEC-Q200:	Yes
Miscellaneous:	Above 105C DC And AC Voltage Derating Is 1.25%/C.

Dimensions	
L	32mm +0.3/-0.7mm
H	17mm +0.1/-0.7mm
T	9mm +0.2/-0.7mm
S	27.5mm +/-0.4mm
H0	18.5mm +/-0.5mm
F	0.8mm +/-0.05mm

Specifications	
Capacitance:	0.15 uF
Capacitance Tolerance:	20%
Voltage AC:	250 VAC
Voltage DC:	1000 VDC
Temperature Range:	-55/+125°C
Rated Temperature:	105°C
Dissipation Factor:	0.05% 1kHz, 0.08% 10kHz
Insulation Resistance:	100 GOhms
Max dV/dt:	350 V/us
Resistance:	42.4 mOhms (100kHz)
Ripple Current:	5.63 Amps (100kHz 90C), 53 Amps (Peak)
Inductance:	18 nH

Packaging Specifications	
Packaging:	T&R, Large
Packaging Quantity:	450

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)