


AxiMax 400 Comm C0G, Ceramic, 100 pF, 5%, 200 VDC, C0G, AxiMax, Commercial Standard

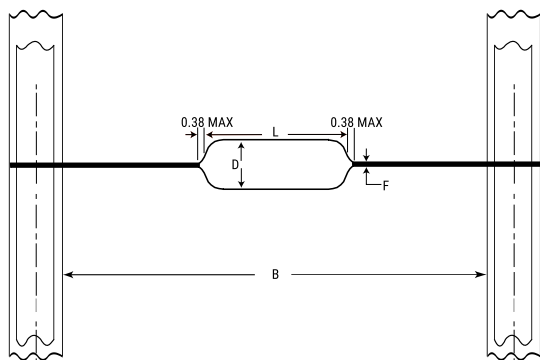

### Dimensions

<b>D</b>	2.41mm MAX
<b>L</b>	4.32mm MAX
<b>F</b>	0.51mm +0.025/-0.076mm
<b>B</b>	52.4mm +/-1.5mm

### Packaging Specifications

<b>Packaging:</b>	T&R, 305mm
<b>Packaging Quantity:</b>	5000

### General Information

<b>Series:</b>	AxiMax 400 Comm C0G
<b>Description:</b>	AxiMax, Commercial Standard
<b>RoHS:</b>	Yes
<b>Termination:</b>	Tin
<b>AEC-Q200:</b>	No
<b>Halogen Free:</b>	Yes

### Specifications

<b>Capacitance:</b>	100 pF
<b>Measurement Condition:</b>	1 MHz 1.0Vrms
<b>Capacitance Tolerance:</b>	5%
<b>Voltage DC:</b>	200 VDC
<b>Dielectric Withstanding Voltage:</b>	500 VDC
<b>Temperature Range:</b>	-55/+125°C
<b>Temperature Coefficient:</b>	C0G
<b>Capacitance Change with Reference to +25°C and 0 VDC Applied (TCC):</b>	30PPM/C, 1MHz 1.0Vrms
<b>Dissipation Factor:</b>	0.1% 1 MHz 1.0Vrms
<b>Aging Rate:</b>	0% Loss/Decade Hour
<b>Insulation Resistance:</b>	100 GOhms

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)