

CWR09KK106KS


General Information

Series

Dielectric

Aliases (T409G106K025SK)

T409 CWR09, Tantalum, MnO2 Tantalum, Military/High Reliability, 10 uF, 10%, 25 VDC, SMD, MnO2, Molded, Military Equivalent, S (0.001%/1000 Hrs), 1.4 Ohms, 6728, Height Max = 3.17mm

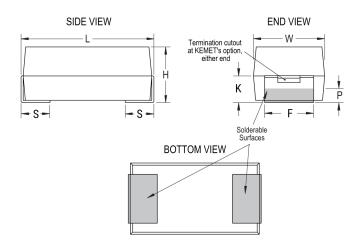

Style SMD Chip Description SMD, MnO2, Molded, Military Equivalent RoHS No 🛕 WARNING: Cancer and reproductive harm – Prop 65 http://www.p65warnings.ca.gov. SCIP Number 656db0b8-8445-4117-82f2-2f12e764f0b1 Termination Solder Fused Qualifications MIL-PRF-55365/4, CWR09 Style AEC-Q200 No Component 266.42 mg Weight Note: When Option C Is Selected For Lead Notes Material, Add An Additional 0.38mm To The Tolerances For "L", "W", "H", "K", "F" And "S". MSL 1

T409 CWR09 MnO2 Tantalum

Specifications	
Capacitance	10 uF
Capacitance Tolerance	10%
Voltage DC	25 VDC (85C), 16.75 VDC (125C)
Temperature Range	-55/+125°C
Rated Temperature	85°C
Dissipation Factor	6% 120Hz 25C
Failure Rate	S (0.001%/1000 Hrs)
Resistance	1.4 Ohms (100kHz 25C)
Leakage Current	3 uA (5min 25°C)
Testing and Reliability	Standard Testing Only

Click here for the 3D model.

Dimensions	
Footprint	6728
L	6.73mm +/-0.38mm
W	2.79mm +/-0.38mm
Н	2.79mm +/-0.38mm
S	1.27mm +0.25/-0.13mm
F	2.67mm +/-0.13mm
К	1.52mm MIN
Р	0.76mm MIN

Packaging Specifications	
Packaging	T&R, 178mm
Packaging Quantity	500

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute – and we specifically disclaim – any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

单击下面可查看定价,库存,交付和生命周期等信息

>>KEMET(基美)