


## PME261JA4150MR30

Aliases (P561HE152M500A)

PME261/P561, Film, Metallized Paper, General Purpose, 1500 pF, 20%, 1000 VDC, 85°C, Lead Spacing = 10.2mm

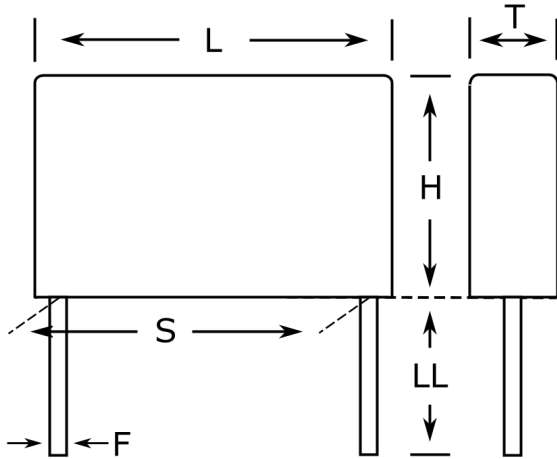

Click [here](#) for the 3D model.

### Dimensions

L	13.5mm -0.5mm
H	7.5mm -0.5mm
T	3.9mm -0.5mm
S	10.2mm +/-0.4mm
LL	30mm +5mm
F	0.6mm +/-0.05mm

### Packaging Specifications

Packaging	Bulk, Bag
Packaging Quantity	1000

### General Information

Series	PME261/P561
Dielectric	Metallized Paper
Style	Radial
Features	Pulse in DC and low frequency applications
RoHS	Yes
Lead	Wire Leads
AEC-Q200	No
Construction	Molded
Component Weight	0.63 g
Miscellaneous	AC Operation: 70C MAX.

### Specifications

Capacitance	1500 pF
Capacitance Tolerance	20%
Voltage AC	500 VAC
Voltage DC	1000 VDC
Temperature Range	-40/+100°C
Rated Temperature	85°C
Dissipation Factor	1.3% 1kHz
Insulation Resistance	12 GOhms
Max dV/dt	2000 V/us

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)