


VP4032K122R300

VP, Varistors, Plastic Encapsulated, 385 V, 300 VAC, 470 V, 775 V, 10 A, 1.2 kA, 30 J, 250 mW $\,$

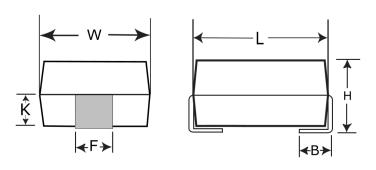

General Information	
Series	VP
Туре	Varistors
Style	SMD Molded
Description	Surface Mount Varistors
Features	Plastic Encapsulated
Termination	Nickel Tin
RoHS	Yes
Qualifications	UL
AEC-Q200	No

Click here for the 3D model.

Packaging Specifications

Packaging Quantity

Packaging

Dimensions	
Chip Size	4032
L	10mm +/-0.5mm
W	8mm +/-0.4mm
Н	4.7mm +/-0.3mm
F	3mm +/-0.3mm
В	1.5mm +/-0.3mm
K	2.3mm +/-0.3mm

_	10111111 7 0.5111111
W	8mm +/-0.4mm
Н	4.7mm +/-0.3mm
F	3mm +/-0.3mm
В	1.5mm +/-0.3mm
K	2.3mm +/-0.3mm

T&R

1000

385 VDC (25C)
300 VAC
-40/+85°C
e Range -40/+125°C
470 VDC at 1 mA
775 V
10 A (8/20 us MAX)
1200 A (8/20 us MAX)
30 J (10/1000 us MAX)
150 pf (1kHz)
470 VDC at 1 mA 775 V 10 A (8/20 us MAX) 1200 A (8/20 us MAX) 30 J (10/1000 us MAX)

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

单击下面可查看定价,库存,交付和生命周期等信息

>>KEMET(基美)