


HV RAD-LDD Mil C0G HV 49467, Ceramic, 4700 pF, 5%, 1000 VDC, C0G, Radial Leaded Multilayer Ceramic Capacitor, Lead Spacing = 14.61mm

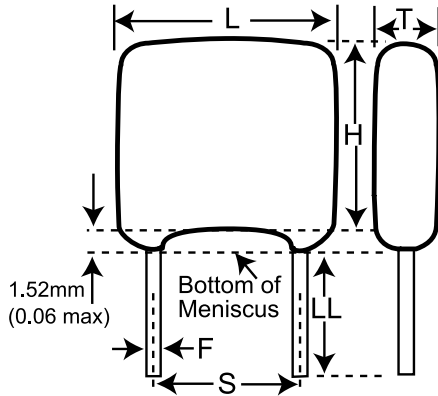

Dimensions	
L	17.02mm NOM
H	15.24mm +/-0mm
T	6.89mm NOM
S	14.61mm +/-0.762mm
LL	3.175mm NOM
F	0.635mm +0.102/-0.051mm

Packaging Specifications	
Packaging Quantity:	20

General Information	
Series:	HV RAD-LDD Mil C0G HV 49467
Style:	Radial
Description:	Radial Leaded Multilayer Ceramic Capacitor
RoHS:	No
Prop 65:	WARNING: Cancer and reproductive harm - www.p65warnings.ca.gov .
SCIP Number:	ef26097b-3862-4ee0-b0ad-404a563ece0f
Termination:	Copper
AEC-Q200:	No

Specifications	
Capacitance:	4700 pF
Capacitance Tolerance:	5%
Voltage DC:	1000 VDC
Dielectric Withstanding Voltage:	1200 VDC
Temperature Range:	-55/+125°C
Temperature Coefficient:	C0G
Capacitance Change with Reference to +25°C and 0 VDC Applied (TCC):	15%
Dissipation Factor:	0.15%
Aging Rate:	0% Loss/Decade Hour
Insulation Resistance:	100 GOhms

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)