


VP3225K401R300

VP, Varistors, Plastic Encapsulated, 385 V, 300 VAC, 470 V, 775 V, 5 A, 400 A, 15 J, 100 mW $\,$

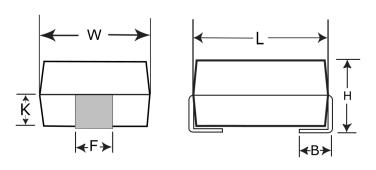

General Information		
Series	VP	
Туре	Varistors	
Style	SMD Molded	
Description	Surface Mount Varistors	
Features	Plastic Encapsulated	
Termination	Nickel Tin	
RoHS	Yes	
Qualifications	UL	
AEC-Q200	No	

Specifications Voltage DC 385 VDC (25C) Voltage AC 300 VAC Temperature Range -40/+85°C Storage Temperature Range -40/+125°C Varistor Voltage 470 VDC at 1mA Clamping Voltage 775 V 5 A (8/20 us MAX) Clamping Current 400 A (8/20 us MAX) Surge Current 15 J (10/1000 us MAX) Energy

70 pF (1kHz)

Click here for the 3D model.

Dimensions		
Chip Size	3225	
L	8mm +/-0.5mm	
W	6.3mm +/-0.4mm	
Н	4.7mm +/-0.3mm	
F	3mm +/-0.3mm	
В	1.5mm +/-0.3mm	
K	2.3mm +/-0.3mm	

Packaging Specifications		
Packaging	T&R	
Packaging Quantity	1000	

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

Capacitance

单击下面可查看定价,库存,交付和生命周期等信息

>>KEMET(基美)