


## T351H336M016AT7301

Aliases (T351H336M016ATTR)

T351, Tantalum, MnO2 Tantalum, Commercial Grade, 33 uF, 20%, 16 VDC, Radial, Solid Tantalum, Conformal, Dipped, Lead Spacing = 2.54mm

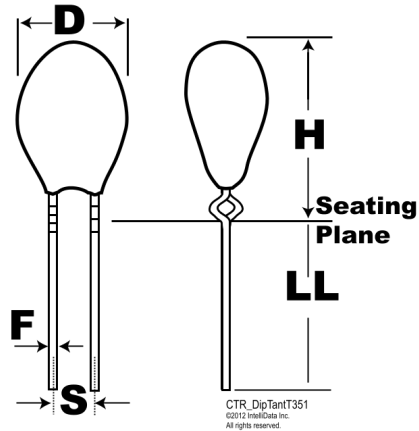

Click [here](#) for the 3D model.

### Dimensions

D	7.6mm
H	12.7mm
S	2.54mm +/-0.38mm
LL	4.75mm +/-0.81mm
F	0.5mm +/-0.05mm

### Packaging Specifications

Packaging	T&R, 305mm
Packaging Quantity	800

### General Information

Series	T351
Dielectric	MnO2 Tantalum
Style	Radial
Description	Radial, Solid Tantalum, Conformal, Dipped
Features	Low Leakage
RoHS	Yes
Termination	Tin
AEC-Q200	No
Notes	Longest Lead Is Positive.

### Specifications

Capacitance	33 uF
Capacitance Tolerance	20%
Voltage DC	16 VDC (85C), 10 VDC (125C), 0.16 VDC (125C Reverse)
Temperature Range	-55/+125°C
Dissipation Factor	6%
Leakage Current	4 uA

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)