


G/PS, Tantalum, Polymer Tantalum, Reduced Volume, 10 uF, 20%, 10 VDC, SMD, Polymer, Miniature, Low ESR, Face Down Terms, 200 mOhms, 2012, Height Max = 1mm

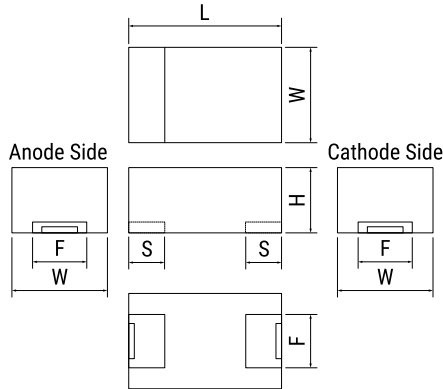

General Information	
Series:	G/PS
Dielectric:	Polymer Tantalum
Style:	SMD Chip
Description:	SMD, Polymer, Miniature, Low ESR, Face Down Terms
Features:	Miniature, Low ESR, Face Down Terminal
RoHS:	Yes
Termination:	Tin
AEC-Q200:	No

Dimensions	
Footprint	2012
L	2mm +/-0.1mm
W	1.25mm +/-0.1mm
H	0.9mm +/-0.1mm
S	0.55mm +/-0.1mm
F	0.9mm +/-0.1mm

Specifications	
Capacitance:	10 uF
Capacitance Tolerance:	20%
Voltage DC:	10 VDC (105°C), 13 VDC (Surge)
Temperature Range:	-55/+105°C
Rated Temperature:	105°C
Dissipation Factor:	6%
Failure Rate:	N/A
Resistance:	200 mOhms (100kHz)
Ripple Current:	354 mAmps (25C)
Leakage Current:	30 uA

Packaging Specifications	
Packaging:	T&R, 178mm

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)