


**KEMET Part Number: PHE820MD6100MR17T1**  
(F720DD104M275P)

PHE820M/F720, Film, Metallized Polyester, Safety, 0.1 uF, 20%, 275 VAC (X2), 760 VDC, 100°C, Lead Spacing = 22.5mm

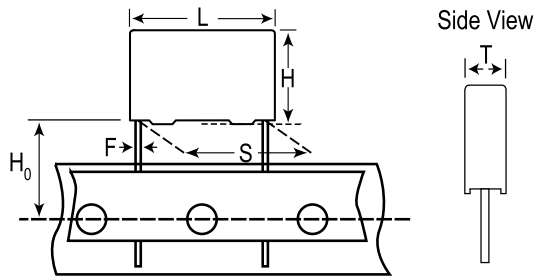

Dimensions	
L	26mm MAX
H	14.5mm MAX
T	6.5mm MAX
S	22.5mm +/-0.4mm
H0	18.5mm +/-0.5mm
F	0.8mm NOM
G	0.5mm NOM

Packaging Specifications	
Packaging:	T&R, Large
Packaging Quantity:	600

General Information	
Series:	PHE820M/F720
Dielectric:	Metallized Polyester
Style:	Radial
Features:	EMI Safety
RoHS:	Yes
Lead:	Wire Leads
Safety Class:	X2
Qualifications:	ENEC, UL, cUL
AEC-Q200:	No
THB Performance:	No
Miscellaneous:	SRF= 4.5 MHz.
Notes:	Not For New Design, Please Check Possible Alternative Parts (AltPart).

Specifications	
Capacitance:	0.1 uF
Capacitance Tolerance:	20%
Voltage AC:	275 VAC (X2)
Voltage DC:	760 VDC
Temperature Range:	-40/+100°C
Rated Temperature:	100°C
Dissipation Factor:	1% 1kHz
Insulation Resistance:	30 GOhms
Max dV/dt:	100 V/us

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)

[>>点击查看相关商品](#)