


TSP, Tantalum, Polymer Tantalum, HRA, 100 uF, 20%, 35 VDC, 3X

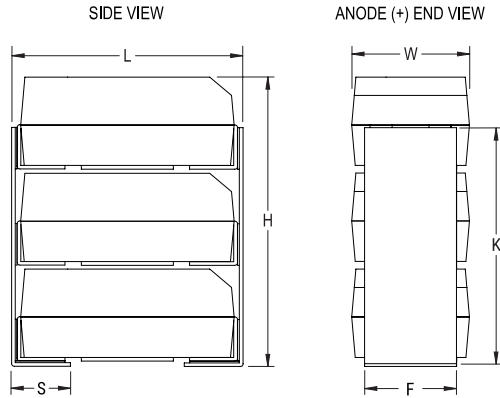

General Information	
Series:	TSP
Dielectric:	Polymer Tantalum
Style:	Stacked Chip
Description:	SMD, Polymer, KO, Stacks, High Reliability
Features:	High Reliability
RoHS:	Yes
Termination:	Tin
Termination (Stack):	Silver Plated
AEC-Q200:	No
MSL:	3

Dimensions	
Case Code	3X
L	8mm +/-0.38mm
W	4.4mm +/-0.2mm
H	13.3mm +/-0.38mm
S	1.9mm +/-0.38mm
F	3mm +/-0.2mm
K	11mm +/-0.38mm

Specifications	
Capacitance:	100 uF
Capacitance Tolerance:	20%
Voltage DC:	35 VDC (105C), 23.45 VDC (125C)
Temperature Range:	-55/+125°C
Rated Temperature:	105°C
Dissipation Factor:	10% 120Hz 25C
Failure Rate:	N/A
Resistance:	20 mOhms (100kHz 25C)
Leakage Current:	350 uA (5min 25°C)
Testing and Reliability:	10 Cycles Surge Current Testing At -55C And +85C

Packaging Specifications	
Packaging:	Tray
Packaging Quantity:	50

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)