


**KEMET Part Number: T49470X01155KBN**  
(L1XN501155KT36)

KPS LDD Mil SMPS PRF49470, Ceramic, 1.5 uF, 10%, 100 VDC, BX, N/A

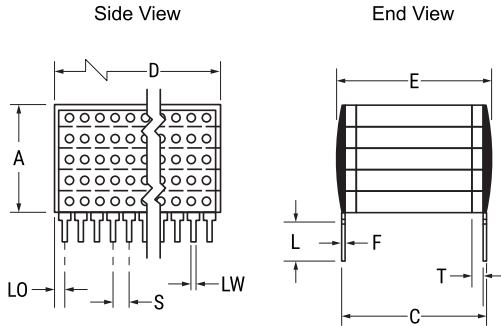

Dimensions	
D	6.335mm +/-0.645mm
L	6.35mm MIN
T	1.397mm MAX
S	2.54mm TYP
F	0.254mm +/-0.051mm
A	9.144mm MAX
C	6.35mm +/-0.635mm
E	7.62mm MAX
G	1.4mm +/-0.25mm
LO	1.586mm MAX
LW	0.508mm +/-0.051mm

Packaging Specifications	
Packaging:	Waffle, Box
Packaging Quantity:	64

General Information	
Series:	KPS LDD Mil SMPS PRF49470
Style:	Leaded Stacked Chip
Description:	Low ESR, High Current Stacked Ceramic Chips
Features:	Low ESR, High Current
RoHS:	No
Prop 65:	<b>WARNING:</b> Cancer and reproductive harm - <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a> .
SCIP Number:	1397a5ac-1739-4afc-b57f-5edc4c8a9f53
Termination:	60/40 Solder Coated
Lead:	Wire Leads
Failure Rate:	N/A
Testing and Reliability:	Level T
Qualifications:	MIL-PRF-49470
AEC-Q200:	No
Notes:	Note: Number of chips in stack depends on design. Note: Lead alignment within pin rows shall be within ±0.13 mm.

Specifications	
Capacitance:	1.5 uF
Capacitance Tolerance:	10%
Voltage DC:	100 VDC
Dielectric Withstanding Voltage:	250 VDC
Temperature Range:	-55/+125°C
Temperature Coefficient:	BX
Dissipation Factor:	2.5%
Insulation Resistance:	666.667 MOhms

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)