


Straight Leads Diameter > 8
Lead and packaging code EA and KA

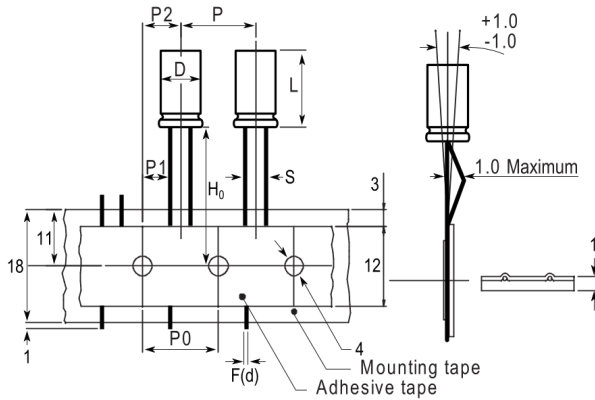

Note: '(j)' correspond to the letters used in the product bulletin

Click [here](#) for the 3D model.

| Dimensions | |
|-------------|----------------|
| D | 10mm +/-0.5mm |
| L | 16mm +2.0/-0mm |
| S | 5mm +/-0.5mm |
| LL Negative | 15mm MIN |
| LL Positive | 20mm MIN |
| F | 0.6mm NOM |

| Packaging Specifications | |
|--------------------------|------|
| Packaging | T&R |
| Packaging Quantity | 1200 |

| General Information | |
|---------------------|------------------------------------|
| Series | ESY |
| Dielectric | Aluminum Electrolytic |
| Description | Single Ended Aluminum Electrolytic |
| RoHS | Yes |
| Lead | Wire Leads |
| AEC-Q200 | No |

| Specifications | |
|-------------------------|-------------------------|
| Capacitance | 330 uF |
| Capacitance Tolerance | 20% |
| Voltage DC | 35 VDC, 44 VDC (Surge) |
| Temperature Range | -40/+105°C |
| Rated Temperature | 105°C |
| Life | 4000 Hrs |
| Dissipation Factor | 12% |
| Resistance | 0.038 Ohms (100kHz 25C) |
| Ripple Current | 1430 mAmps (120Hz 105C) |
| Leakage Current | 115.5 uA (2min 20°C) |
| Impedance Ratio at -25C | 2 |
| Impedance Ratio at -40C | 3 |

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)