


TEPSLB150J157M(35)8R

Aliases (PSLB150J157M(35)8R-T&R)

PS/L, Tantalum, Polymer Tantalum, 150 uF, 20%, 6.3 VDC, SMD, Molded, Polymer, Low Profile, Low ESR, 35 mOhms, 3528, Height Max = 1.5mm

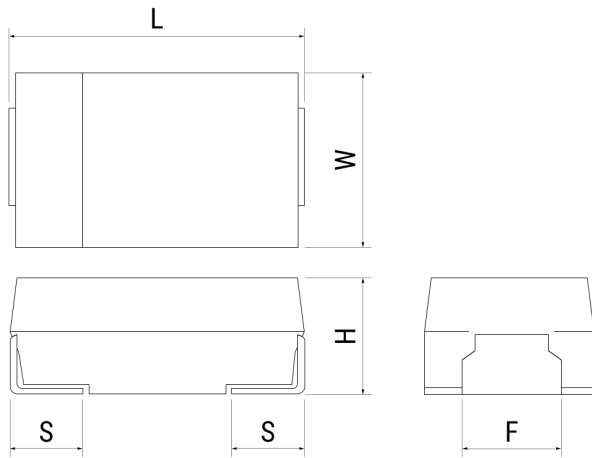

Click [here](#) for the 3D model.

Dimensions	
Footprint	3528
L	3.5mm +/-0.2mm
W	2.8mm +/-0.2mm
H	1.4mm +/-0.1mm
S	0.8mm +/-0.2mm
F	2.2mm +/-0.1mm

Packaging Specifications

Packaging T&R, 178mm

General Information	
Series	PS/L
Dielectric	Polymer Tantalum
Style	SMD Chip
Description	SMD, Molded, Polymer, Low Profile, Low ESR
Features	Low Profile, Low ESR
RoHS	Yes
Termination	Tin
AEC-Q200	No

Specifications	
Capacitance	150 uF
Capacitance Tolerance	20%
Voltage DC	6.3 VDC (105°C), 8.2 VDC (Surge)
Temperature Range	-55/+105°C
Rated Temperature	105°C
Dissipation Factor	10%
Failure Rate	N/A
Resistance	35 mOhms (25C, 100kHz)
Ripple Current	1512 mAmps (25C, 100kHz)
Leakage Current	94.5 uA

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)