


C4BS, Film, Metallized Polypropylene, Power, 4 uF, 5%, 600 VAC, 1000 VDC, 70°C, Lead Spacing = 37mm

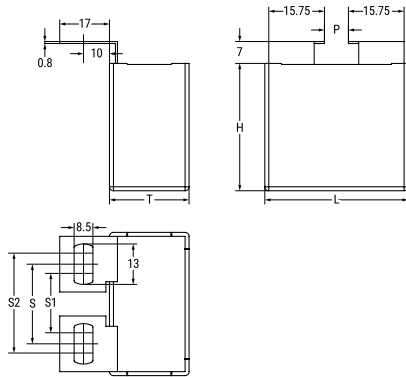

Dimensions

L	57.5mm +1.2/-0.7mm
H	50mm +0.3/-0.7mm
T	35mm +0.5/-0.7mm
S	37mm +/-0.2mm
S1	32mm +/-0.2mm
S2	42mm +/-0.2mm
P	21mm NOM

Packaging Specifications

Packaging:	Bulk, Bag
Packaging Quantity:	21

General Information

Series:	C4BS
Dielectric:	Metallized Polypropylene
Style:	Radial
Features:	IGBT Circuit
RoHS:	Yes
Lead:	Flat Tabs
AEC-Q200:	No
Miscellaneous:	KEMET Style W Tabs.

Specifications

Capacitance:	4 uF
Capacitance Tolerance:	5%
Voltage AC:	600 VAC
Voltage DC:	1000 VDC
Temperature Range:	-40/+85°C
Rated Temperature:	70°C
Max dV/dt:	512 V/us
Resistance:	2.2 mOhms (100kHz)
Ripple Current:	40 Amps (100kHz 70C), 2049 Amps (Peak)
Inductance:	48 nH

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)