


ALC40, Aluminum Electrolytic, 12,000 uF, 20%, 25 VDC, -40/+105°C

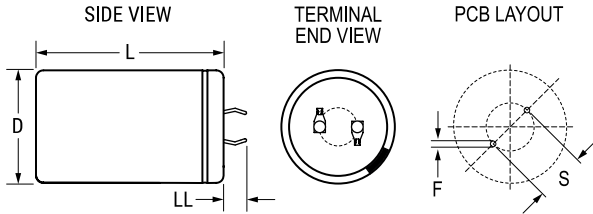

Dimensions	
D	30mm +1mm
L	30mm +/-2mm
S	10mm +/-0.1mm
LL	4mm +/-1mm
F	2mm +/-0.1mm

Packaging Specifications	
Packaging:	Bulk, Bag

General Information	
Series:	ALC40
Dielectric:	Aluminum Electrolytic
Description:	Snap-In, Aluminum Electrolytic
RoHS:	Yes
Lead:	2 Pin Short
AEC-Q200:	No
Component Weight:	35 g
Shelf Life:	156 Weeks

Specifications	
Capacitance:	12,000 uF
Capacitance Tolerance:	20%
Voltage DC:	25 VDC, 28.75 VDC (Surge)
Temperature Range:	-40/+105°C
Rated Temperature:	105°C
Life:	7000 Hrs (Rated Voltage And Ripple Current At 105C), 11000 Hrs (Rated Voltage At 105C)
Resistance:	157 mOhms (100Hz 20C), 138 mOhms (10kHz 20C)
Ripple Current:	2.18 Amps (100Hz 105C), 2.33 Amps (10kHz 105C)
Leakage Current:	900 uA (5min 20°C)

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)