


KEMET Part Number: M49470R01155KCJ
(L1RJ502155KB65)

KPS LDD Mil SMPS PRF49470, Ceramic, 1.5 uF, 10%, 200 VDC, BR, N/A

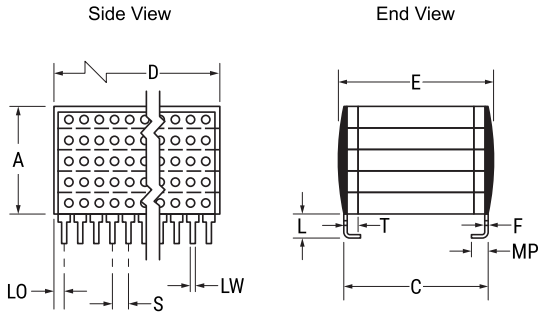

Dimensions

D	6.335mm +/-0.645mm
L	1.78mm +/-0.25mm
T	1.397mm MAX
S	2.54mm TYP
F	0.254mm +/-0.051mm
A	16.51mm MAX
C	6.35mm +/-0.635mm
E	7.62mm MAX
LO	1.586mm MAX
LW	0.508mm +/-0.051mm
MP	1.27mm MIN

Packaging Specifications

Packaging:	Waffle, Box
Packaging Quantity:	64

General Information

Series:	KPS LDD Mil SMPS PRF49470
Style:	Leaded Stacked Chip
Description:	Low ESR, High Current Stacked Ceramic Chips
Features:	Low ESR, High Current
RoHS:	No
Prop 65:	WARNING: Cancer and reproductive harm - www.p65warnings.ca.gov .
Termination:	60/40 Solder Coated
Lead:	J Leads
Failure Rate:	N/A
Testing and Reliability:	Level B
Qualifications:	MIL-PRF-49470
AEC-Q200:	No
Notes:	Note: Number of chips in stack depends on design. Note: Turn Radius For Lead Extension Is 0.1 Radians (Typical). Note: Lead alignment within pin rows shall be within ±0.13 mm.

Specifications

Capacitance:	1.5 uF
Capacitance Tolerance:	10%
Voltage DC:	200 VDC
Dielectric Withstanding Voltage:	500 VDC
Temperature Range:	-55/+125°C
Temperature Coefficient:	BR
Insulation Resistance:	666.667 MOhms

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)