


KEMET Part Number: PHE450HA5180JR17T0
(F450AG183J250L)

PHE450/F450, Film, Double Metallized Polypropylene, General Purpose, 0.018 uF, 5%, 250 VDC, 85°C, Lead Spacing = 10mm

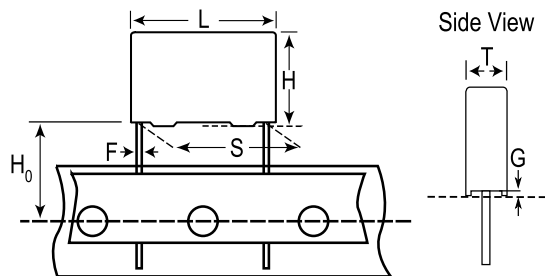

General Information	
Series:	PHE450/F450
Dielectric:	Double Metallized Polypropylene
Style:	Radial
Features:	Pulse
RoHS:	Yes
Lead:	Wire Leads
AEC-Q200:	No
Miscellaneous:	The Rated Voltage Decreases 1.3%/C Between +85C And +105C. R _{thja} = 142 C/W (85C), 0.2 m/s.

Dimensions	
L	13mm -0.5mm
H	9mm -0.5mm
T	4mm -0.5mm
S	10mm +0.4/-0.4mm
H ₀	18.5mm +/-0.5mm
F	0.6mm +/-0.05mm
G	0.5mm NOM

Packaging Specifications	
Packaging:	T&R
Packaging Quantity:	900

Specifications	
Capacitance:	0.018 uF
Capacitance Tolerance:	5%
Voltage AC:	180 VAC
Voltage DC:	250 VDC (85C), 185 VDC (105C)
Temperature Range:	-55/+105°C
Rated Temperature:	85°C
Dissipation Factor:	0.03% 1kHz, 0.04% 10kHz, 0.15% 100kHz
Insulation Resistance:	100 GOhms
Max dV/dt:	1100 V/us
Inductance:	6 nH

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)