


## R76IN382040H3J

Aliases (76IN382040H3J)

R76H, Film, Double Metallized Polypropylene, Automotive Grade, 0.82  $\mu$ F, 5%, 250 VDC, 105°C, Lead Spacing = 22.5mm

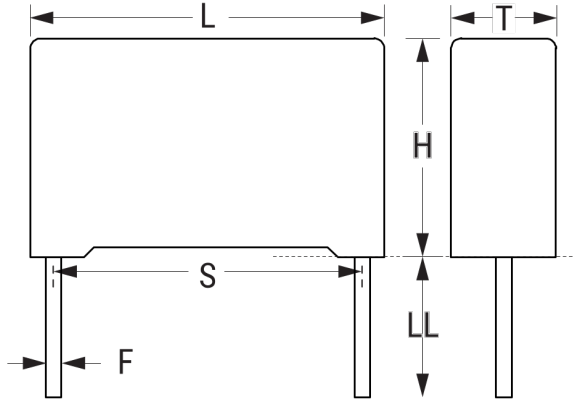

Click [here](#) for the 3D model.

### Dimensions

L	26.5mm +0.3/-0.5mm
H	18.5mm +0.1/-0.5mm
T	10mm +0.2/-0.5mm
S	22.5mm +/-0.4mm
LL	30mm +5mm
F	0.8mm +/-0.05mm

### Packaging Specifications

Packaging	Bulk, Bag
Packaging Quantity	300

### General Information

Series	R76H
Dielectric	Double Metallized Polypropylene
Style	Radial
Features	Automotive Grade, Pulse
RoHS	Yes
Lead	Wire Leads
Qualifications	AEC-Q200
AEC-Q200	Yes
THB Performance	Yes

### Specifications

Capacitance	0.82 $\mu$ F
Capacitance Tolerance	5%
Voltage AC	180 VAC
Voltage DC	250 VDC
Temperature Range	-55/+125°C
Rated Temperature	105°C
Dissipation Factor	0.03% 1kHz, 0.06% 10kHz
Insulation Resistance	36.585 GOhms
Max dV/dt	300 V/us
Resistance	3.88 mOhms (100kHz)
Ripple Current	10.52 Amps (100kHz 100C), 246 Amps (Peak)
Inductance	16 nH

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)