
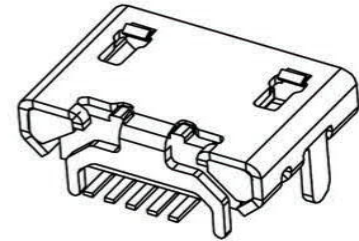
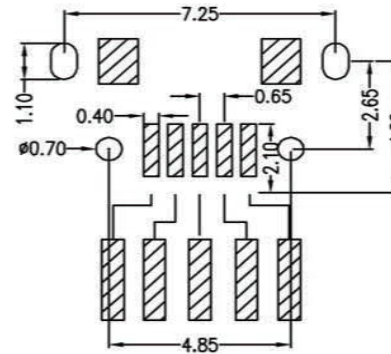



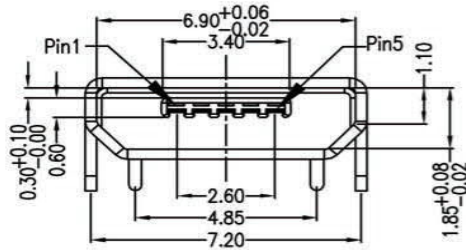


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE

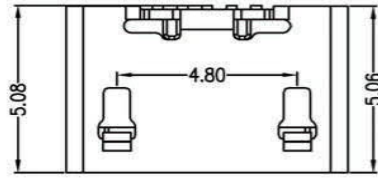

Note:

1.Material:

- 1.1 Housing: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: copper alloy,t=0.15mm
- 1.3 Shell: copper alloy,t=0.30mm

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 50 mW Max.
- 2.4 Insulation resistance: 100 MW Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.0.81~2.05 Kgf Min.after 10000 insertion/extraction cycles
- 2.7 Temperature range: -30°C~80°C

PART NO: A01SBXXXXXX1-067		MATERIAL: SEE NOTE		金航标		WWW.BDS666.COM	
MODEL NO: XX		FINISH: SEE NOTE				0755-83044319	
UNIT: MM	SIZE: A4	COLOR: SEE NOTE		TITLE:			
TOLERANCE UNSPECIFIED		DR: 夏友红		MIRCO USB 5S B TYPE 四脚全插(牛角型)短针			
.x	0.25	CHK:		DWG NO: A067		REV: A	
.xx	0.15	APP:		SCALE: 5:1		DATE: 2012.05.02	
.xxx	0.10						
Ang.	2'						

单击下面可查看定价，库存，交付和生命周期等信息

[>>kinghelm\(金航标\)](#)