



技术参数 (SPECIFICATION):

- 温度范围 (TEMPERATURE RANGE): -40~+70℃
- 额定电压 (VOLTAGE RATING): 125V
- 额定电流 (CURRENT RATING): 1.5A
- 接触电阻 (CONTACT RESISTANCE): ≤30mΩ
- 绝缘电阻 (INSULATION RESISTANCE): ≥500MΩ
- 耐压 (DIELECTRIC STRENGTH): 500V AC/(50HZ)/Min
- 插拔力 (MATING AND UNMATING FORCE): 3~20N
- 寿命 (DURABILITY): 750 CYCLES MIN

Table 1

X	Terminal Plating
0	Au Fu" Plating
1	Au 1u" Plating
2	Au 2u" Plating
3	Au 3u" Plating
4	Au 6u" Plating
5	Au 10u" Plating
6	Au 15u" Plating
7	Au 30u" Plating

Material & Plating

Part NO.:

RCH563114-DW-X-XX

LED position

Material & Color

Table 2





D	L LED/R LED
YG	YELLOW/GREEN
GY	GREEN/YELLOW
YY	YELLOW/YELLOW
GG	GREEN/GREEN
OO	OTHER/OTHER

Table 3

XX	Material/Color
BB	PBT/BLACK
BW	PBT/WHITE
AB	PA/BLACK
AW	PA/WHITE
OO	OTHER/OTHER

6	外壳	H62	1	NI	
5	LED灯	树脂/FE	8	NI/AG	
4	插针	PHOSPHOR BRONZE	32	"FU"	
3	中分体	PA46	2	BLACK	
2	右分体	PA46	1	BLACK	
1	左分体	PA46	1	BLACK	
序号	名称	材料	数量	镀层/颜色	备注

深圳市金航标电子有限公司		WWW.BDS666.COM	
KH-RCH56-8P8C-1X4-D		0755-83044319	
一般公差		品名:	RCH-56-31-14(带灯无弹)
30~	±0.25	料号:	RCH563114-YGW-0-AB
10~30	±0.20	型号:	RJ45
~10	±0.15	图号:	
角度:	±2°	版本:	
页面:	1 of 1	单位: mm	比例: 1:1
		纸张: A4	

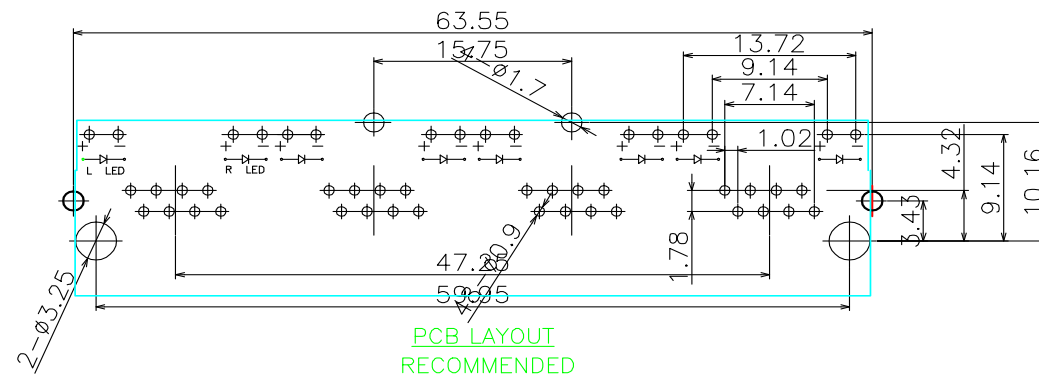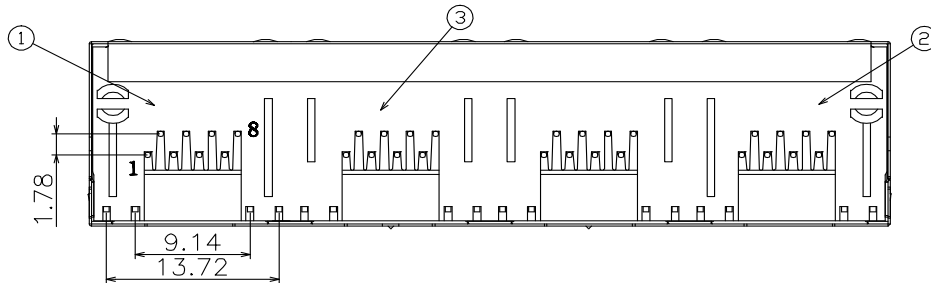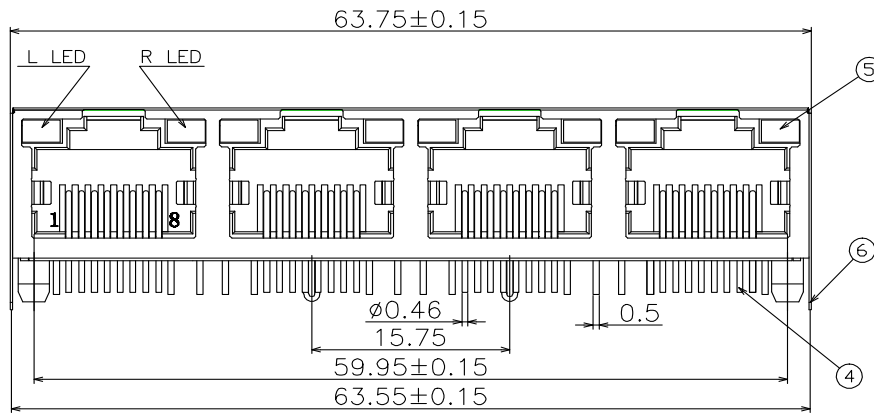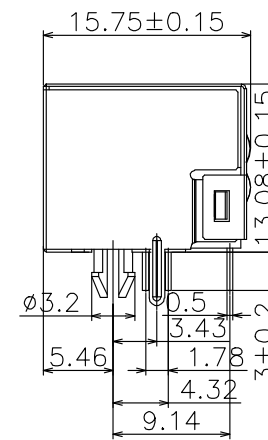

网络插座外形图

绘图:	日期:
审核:	日期:
核准:	日期:

新出版发行

变更履历

A/0

版次

1

2

3

图

1

2

3

4

5

6

7

8

9

10

11

G

F

E

D

C

B

A

A

B

C

D

E

改

涂

意

随

图

面

在

止

禁

单击下面可查看定价，库存，交付和生命周期等信息

[>>kinghelm\(金航标\)](#)