
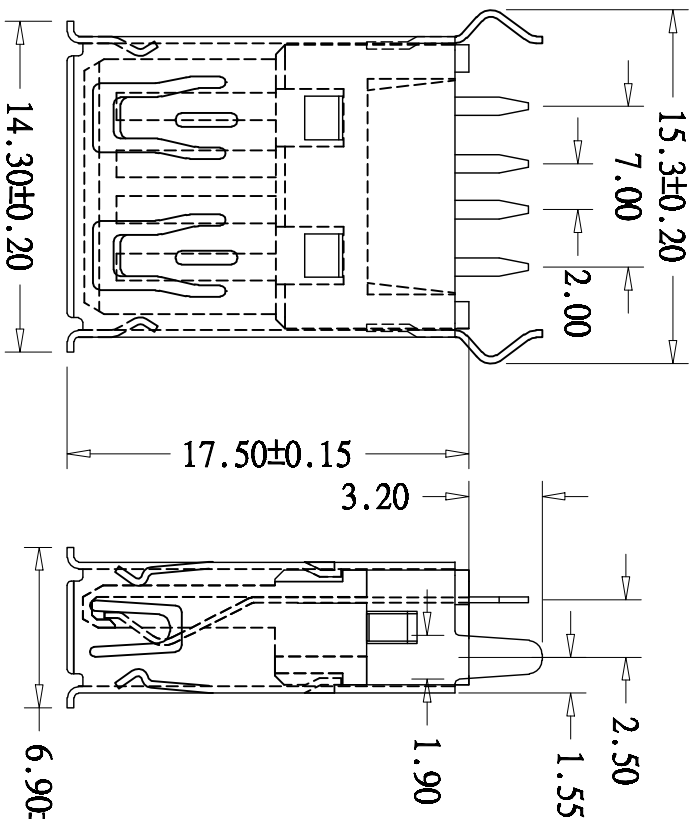


# Kinghelm®

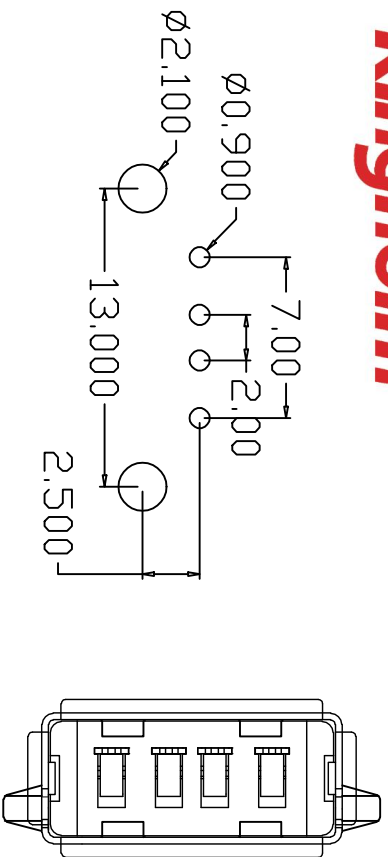

**规格书:** Specifications:

- 额定电流: Current Rating  
1.5A/contact terminal
- 额定电压: Voltage Rating  
30V DC
- 接触电阻: Contact Resistance  
30 milliohms MAX
- 耐压: Dielectric Withstanding Voltage:  
500 V AC AT Sea Level
- 绝缘电阻: Insulation Resistance:  
1000MEGA ohms MIN

**物理性能:** Mechanical:

- 插拔力: Connector Mate and Unmate Force  
Mate force: 3.57kgf(MAX)  
Unmate force: 1.02kgf(MIN)
- 端子保持力: Terminal Retention  
1.0kgf(MIN)

**1. 塑胶:** Housing:

Hing Temperature Thermoplastics,

- 端子: Contact: Copper Alloy C2680
- 外壳: Shell: Copper Alloy C2680/SPCC

1. 端子: Contact: Plated Gold in Mating Area;  
Tin On Solder Talls  
端子四周镀50U”(MIN) 镀, 镀金区域镀100—200U” 镀金1U”

铜壳四周镀80U”(MIN) 镀

Nickel Plating

公差一覽表 TOLERANCE UNLESS OTHERWISE	日期 DATE	單位 UNIT	圖號 DRAWING	圖名 NAME	版本 VER
X±0.15	X±5"	MM	1:1	KH-AF180WJ-17.5-JB	0755-83044319
XXX±0.02	.XX±1"	角法 VIEW	設計 DESIGN	核准 APPROVE	製板 SHEET
MANUFACTURE DWG	DATE	MM	DESIGN	APPROVE	SHEET
深圳市金航标电子有限公司					
WWW.BDS666.COM					

Max	Modification	Date	Draw	Approve
-----	--------------	------	------	---------

单击下面可查看定价，库存，交付和生命周期等信息

[>>kinghelm\(金航标\)](#)