Kinghelm®

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

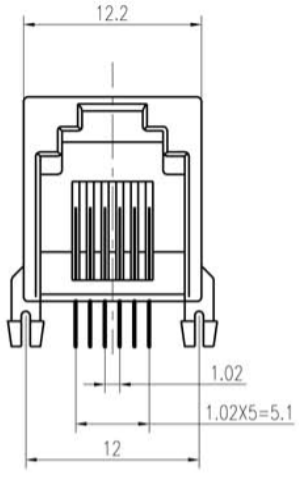

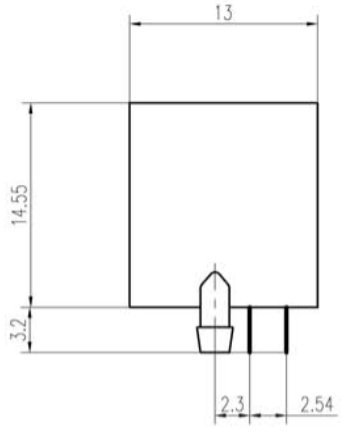



PCB LAYOUT

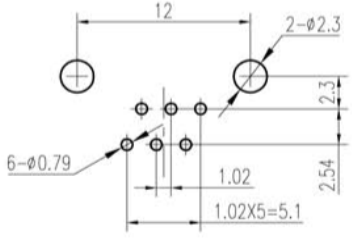

NOTES:

ELECTRICAL:

1. VOLTAGE RATING :125 VAC RMS.
2. CURRENT RATING :1.5 AMP.
3. CONTACT RESISTANCE :30 MILLIOHMS MAX.
4. INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC .
5. DIELECTRIC STRENGTH :1000V AC RMS 50Hz. 1MIN.

MECHANICAL:

1. HOUSING MATERIAL :GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL :PHOSPHOR BRONZE φ0.46mm.
3. PLATING :GOLD PLATING OVER NICKEL.
4. OPERATING :750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER :1 LB MIN.

ENVIRONMENTAL:

1. Temperature Range : -45℃～+85℃
2. Relative Humidity : 90～95% (40±2℃)

PART NUMBER:

DY 124 – □ – □ – □

- □3u″ □6u″ □15u″ □30u″ □50u″ □PD20u″
- □ B(Black color) □G(Gray color)
- □6P2C □6P4C □6P6C
- Part No.

DETACHED LISTS	mm (inch)	DFTO:	DATE:	深圳市金航标电子有限公司
		CHKD:	DATE:	
	Tolerance Exept as Noted	MFO:	DATE:	WWW.BDS666.COM
	mm 0±0.2 ± 00±0.15 ± 000±0.075 ±	APPVL:	DATE:	型号：KH-PCB-6P6C
		MATERIAL:		0755-83044319
	ANGLES ± 0.5	Q`TY:		DRAWING NO. / PART NO. — SIZE A4 — REV 06/05/02 0
		FINISH:		
		SCALE: 2:1		DO NOT SCALE DRAWING — SHEET OF

Downloaded From Oneyac.com

单击下面可查看定价，库存，交付和生命周期等信息

>>kinghelm(金航标)

Downloaded From Oneyac.com