

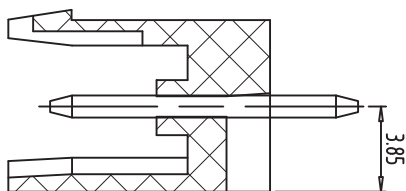
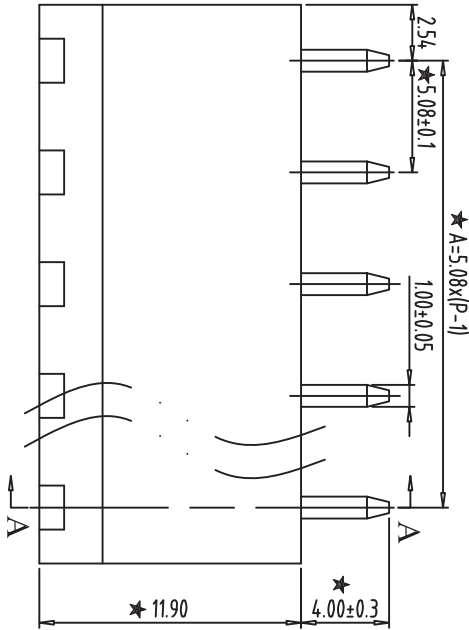
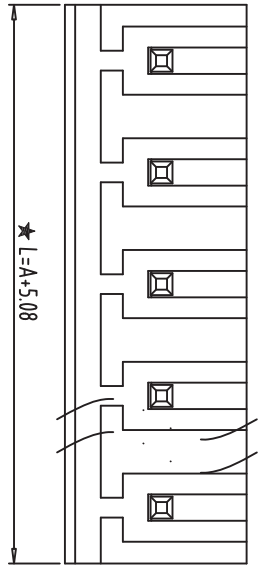


PCB LAYOUT
S=2:1

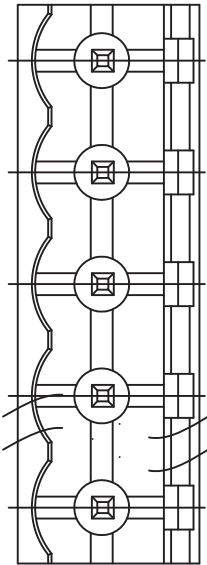

SECTION:A-A

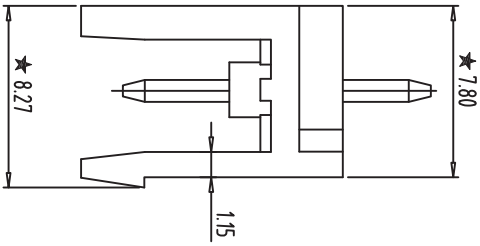

- NOTES:
1. Rating:300V 15A ;
 2. Insulation Withstands Voltage: AC2000V/MIN
 3. Insulation Resistance: 500MΩ or more at DC500V
 4. Using Temperature Range: -40°C~+105°C
 5. "★" is the important dimension
 6. RoHS compliance

Total Pitch Tolerances		Nominal dimension range																					
In mm		In mm																					
0	to	0	30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	200	250	0	over		
±0.18	to	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	SK	DATE	2014/08/19	SIZE	A4
CHK	DATE	SCALE	3:1	UNITS	mm
APP.	DATE	SCALE	3:1	SHEET/OF	1/1

深圳市金航标电子有限公司
KH-F400V-8P-5.08G
WWW.BDS666.COM
0755-83044319

单击下面可查看定价，库存，交付和生命周期等信息

[>>kinghelm\(金航标\)](#)