



Kinghelm®

Rev.	ECN Number	Description	Date	Drawn	Checkd	Approved

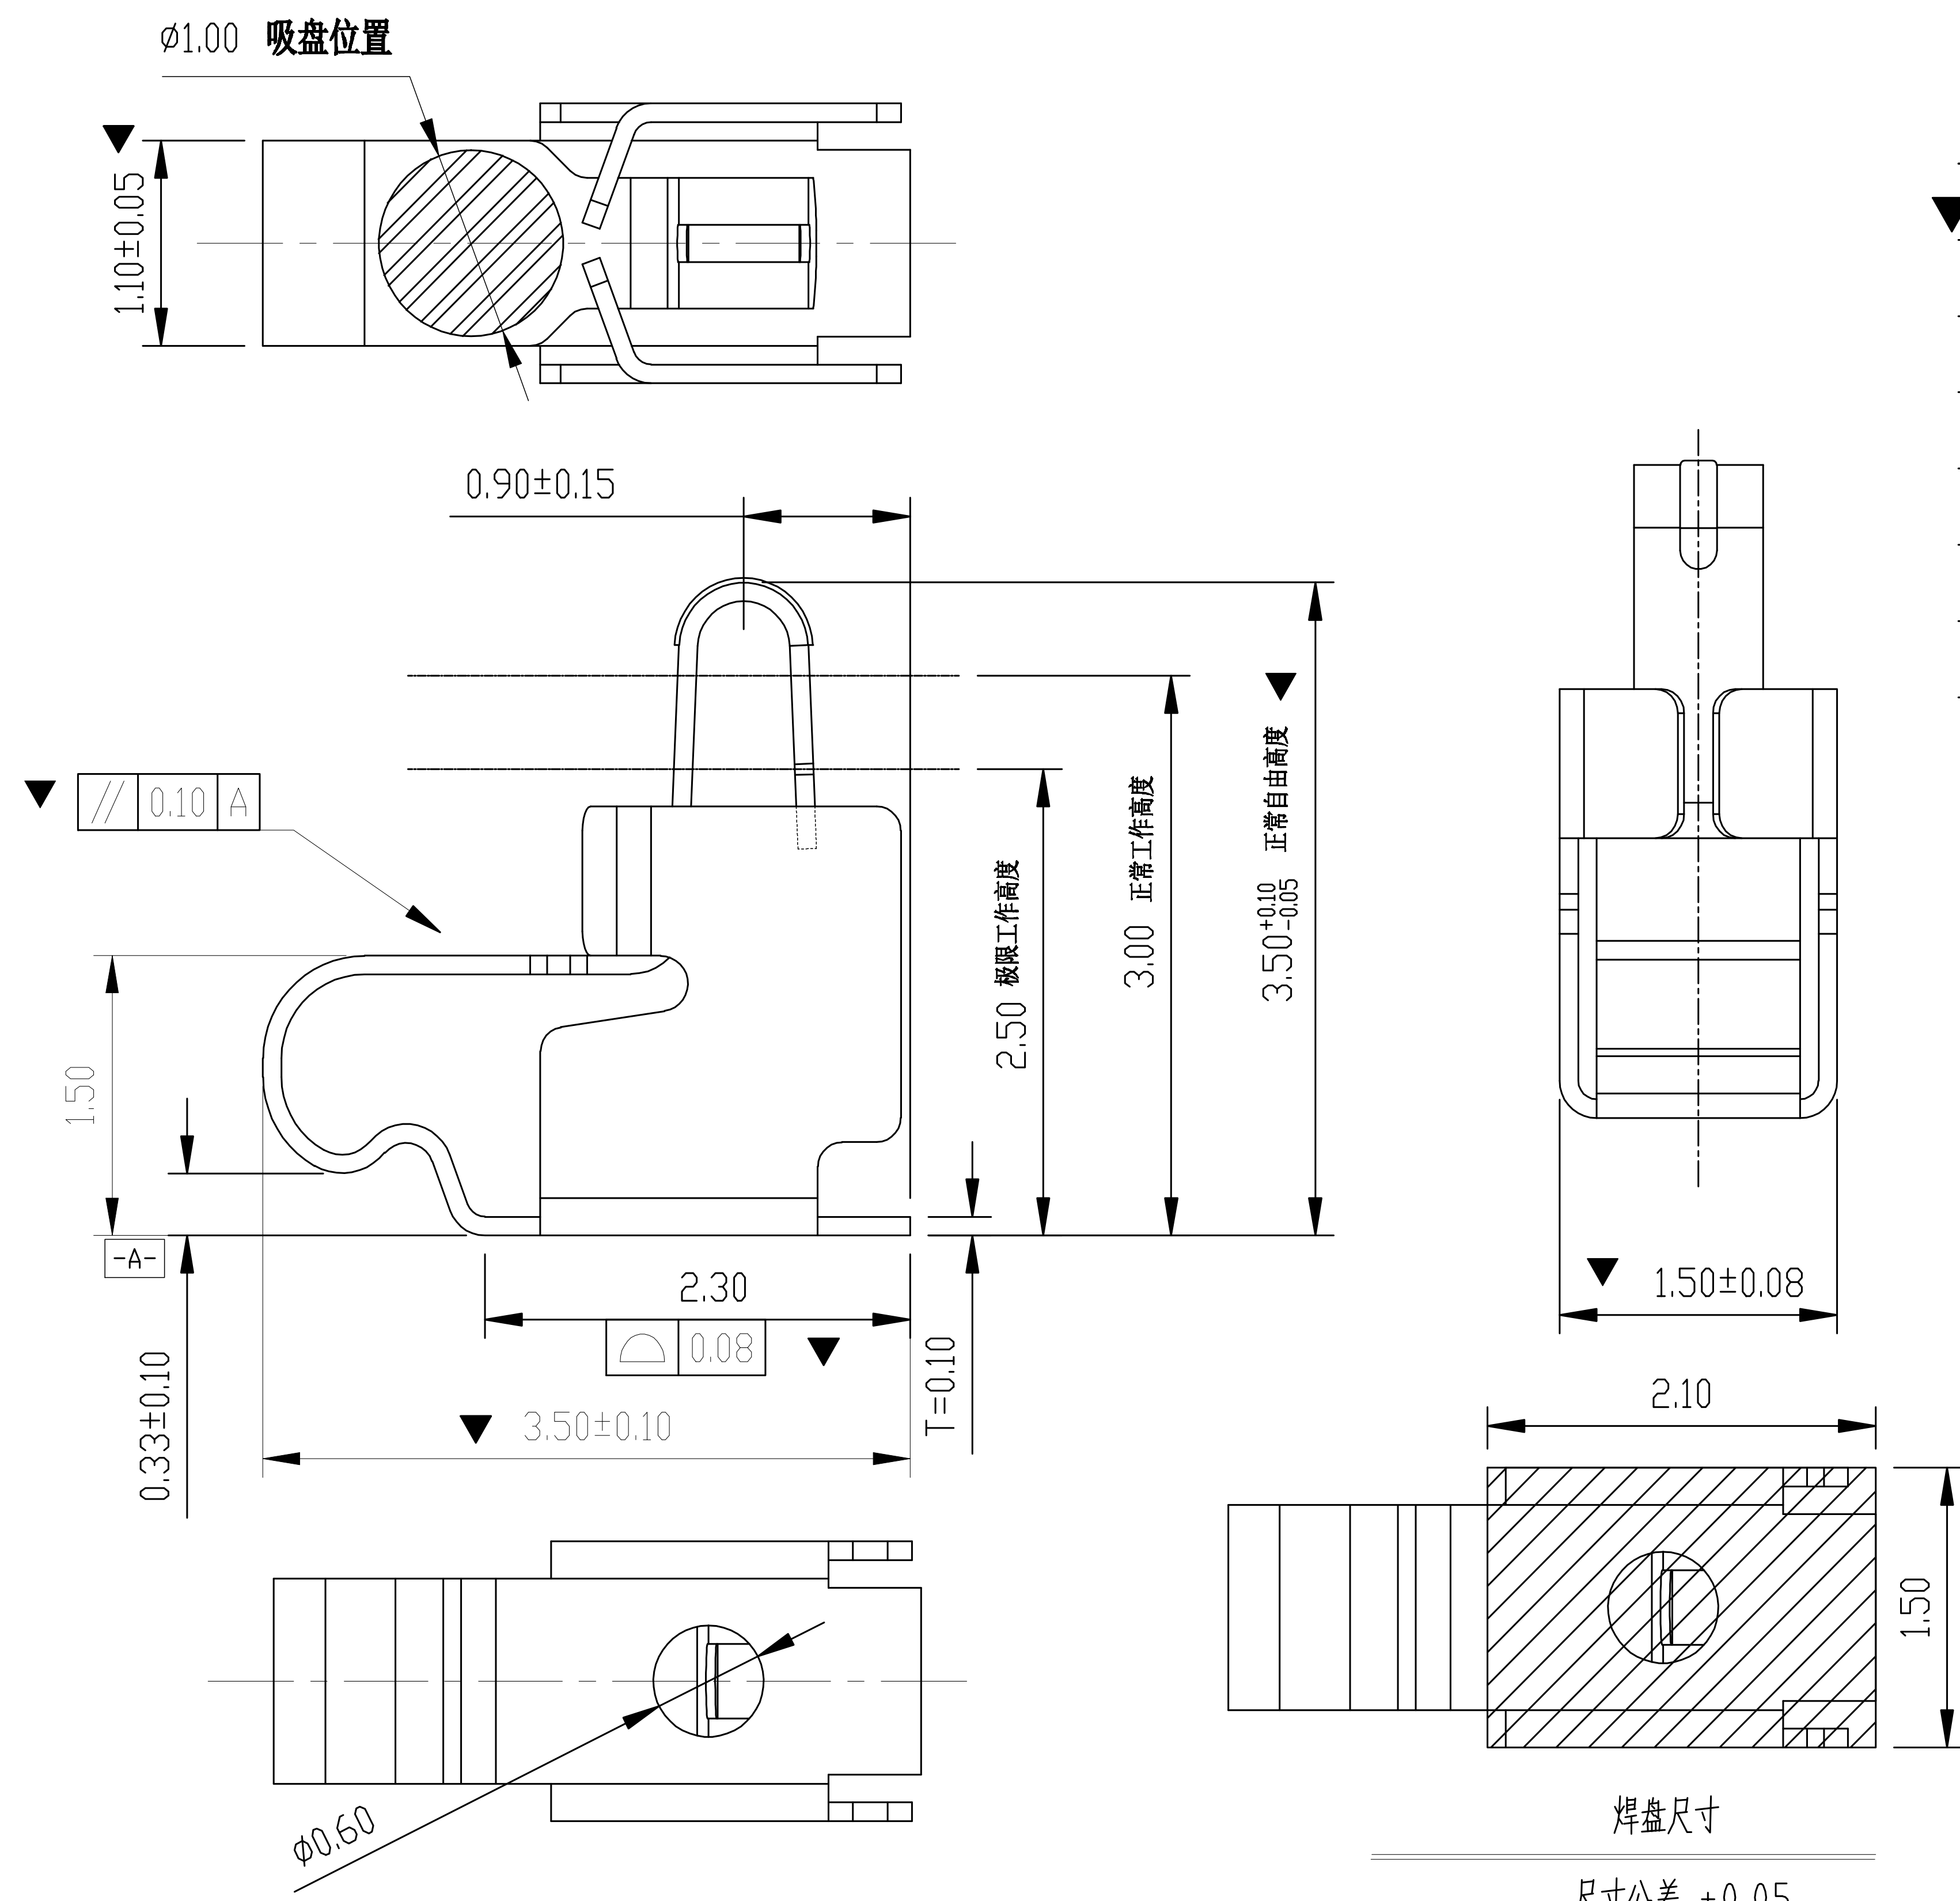

技术要求:

1. 材质: 不锈钢SUS304, T=0.10±0.005;
2. 端子锡脚焊接面和接触面不可有毛边, 其他部位毛边最大0.03mm;
3. 扭曲: 45°/1000mm, 拱形 5mm/1000mm;
4. 标示有“▼”符号的为重点控制和检验尺寸;
5. 未标注之R MAX R0.13;
6. 电镀须满足48小时盐雾测试;
7. 寿命测试>2万次, 产品弹力要求在60gf~80gf之间
8. 镍底50~80u"min, 焊接区域镀金, 接触区域镀金3U"MIN

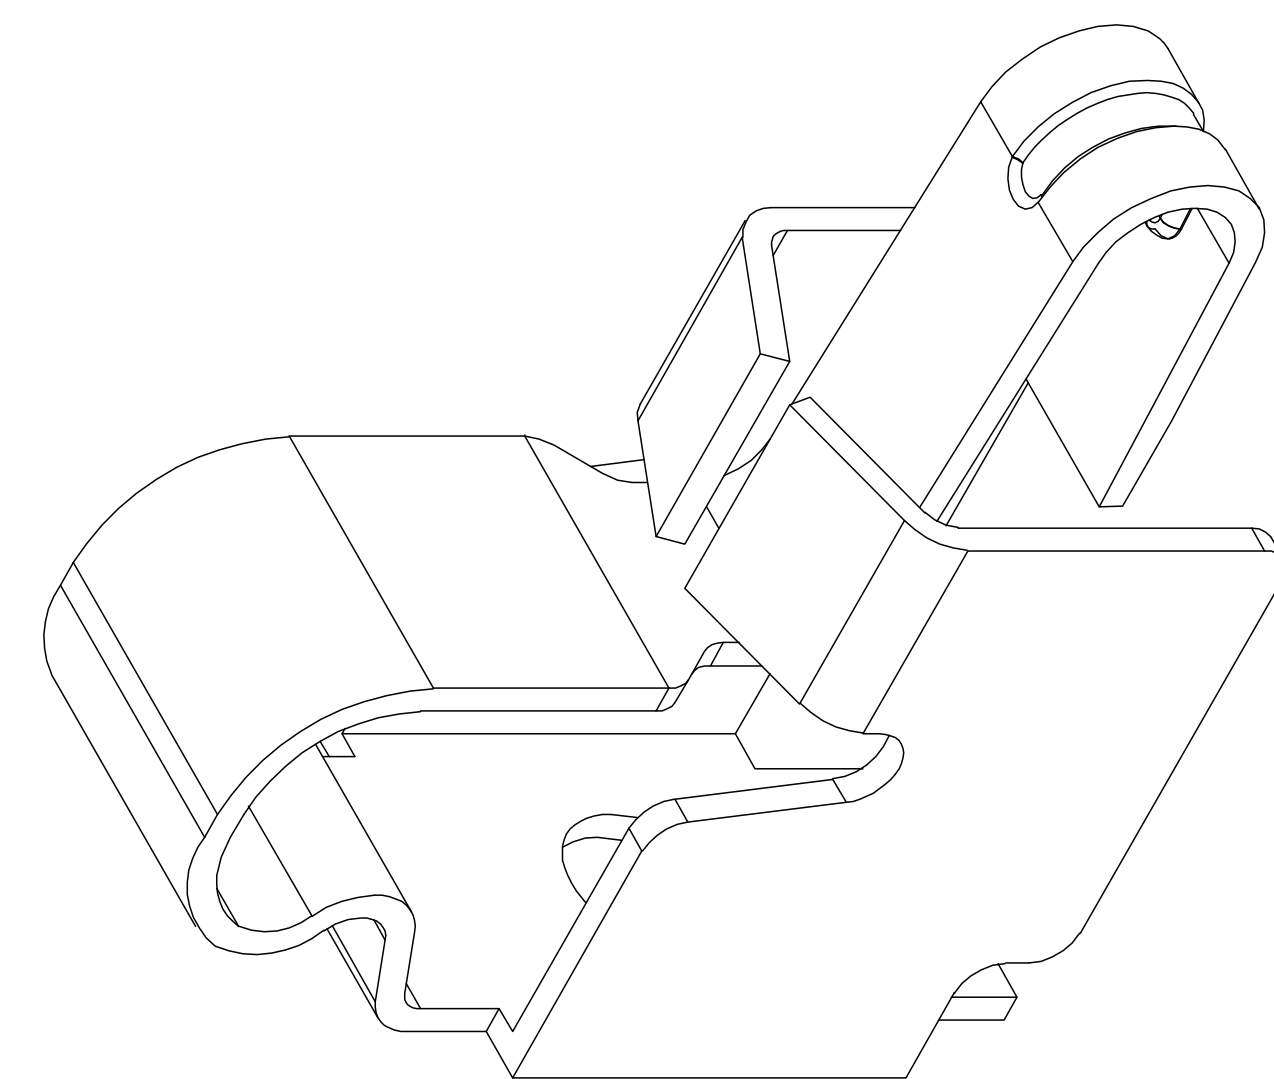

深圳市金航标电子有限公司 WWW.BDS66.COM 型号: KH-351535-TP 0755-83044319	GENERAL TOLERANCE		SCALE: 1:1	DRAWN	DATE	DWG. NO.	TITLE	REV.
	XX. ±0.50	X.° ±2.0°	UNIT: mm	CHECK	DATE	681-0019A-1		A
	X. ±0.35		.X ±1.0°	SIZE: A4	APPROVE	DATE	PARTS NO.(INTENDED USE)	SHEET
	.X ±0.25	.XX ±0.5°				FDX0019A1	RF Antenna Spring,SMT, L3.5*W1.5*H3.5mm	1/1

单击下面可查看定价，库存，交付和生命周期等信息

[>>kinghelm\(金航标\)](#)