


| REVISIONS | | | | | |
|-----------|--------|-------------|-----|-----|------|
| REV | NUMBER | DESCRIPTION | DWN | CHK | DATE |
| A | | DESIGN | | | |

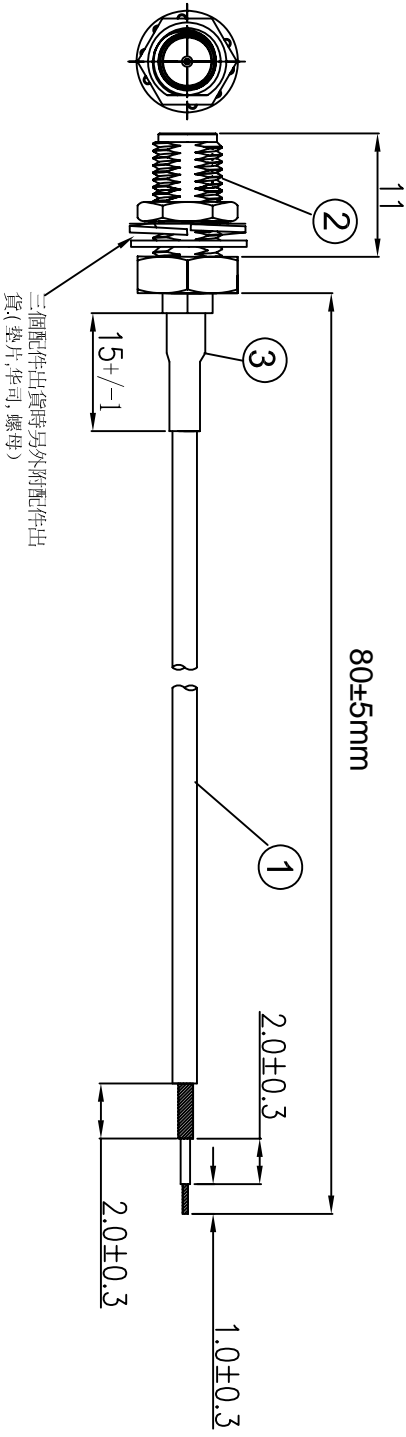

NOTES:

1. ELECTRICAL:
 - 1.1. VOLTAGE RATING:DCV 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPENS/SHORT, MISWIRING AND INTERMITTENT FAILURES.
2. MATERIAL:
 - 2.1. SEE TABLE
3. ALL COMPONENTS ARE ROHS COMPLIANT.

| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|----------|-------------|----------------------|------|
| ① | 同轴线 | RF 1.13黑色线,OD:1.13mm | AS |
| ② | 接头 | SMA母头母针, 分体, 11牙, 镀金 | 1 |
| ③ | 套管 | 黑色热缩套管, OD:2.0MM | AS |

深圳市金航标电子有限公司 www.bds666.com

型号: KH-122-SMA-80 0755-83044319

| | | | | | |
|---|--|-------|------------|------------------------|--------------|
| ALL DIMENSION ARE IN MM | | DRAWN | DATE | SMA /F TO OPEN L=80 mm | |
| | | Jamy | 2020-06-15 | SIZE | REV |
| COMPUTER GENERATED IN SOLIDWORKS | | ENG. | | B | A |
| DO NOT SCALE THIS DRAWING | | MFG. | | SCALE: Free | TYPE |
| PROJECTION | | Q.A. | | | SHEET 1 OF 1 |
| GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ± 1° ± 0.3 ± 0.25 ± 0.150 | | | | | |

CUSTOMER P/N:

单击下面可查看定价，库存，交付和生命周期等信息

[>>kinghelm\(金航标\)](#)