



Rating: 0.5A 30V DC  
 Contact Resistance: 100 mΩ Max.  
 Operating temperature: -20°C ~ 70°C  
 Operating force: 3-20N  
 Operating Life: 10,000 cycles



CIRCUIT DIAGRAM

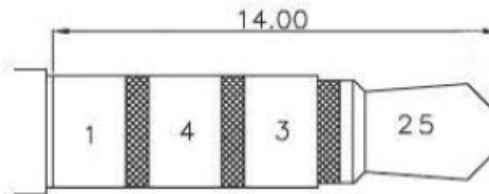

$\Phi 3.5$ , MATE PLUG

②	Terminal	5	Phosphor bronze	Au Plating		
①	Housing	1	Nylon	Black		
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE	KH-35-K500-EJ		
DRAWN				TITLE: PHONE JACKS		
CHECKED				PART NO. PJ-S32545		
APPROVALS						
TOLERANCES ARE		30~0.1	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30	±0.20			PROJ:
		5~10	±0.15			
		~ 5	±0.10	±2'	DRAWING NO.	SHEET 1 OF 1

ECN NO.	REV.	DATE.	Downloaded From <a href="http://Oneyac.com">Oneyac.com</a>	CHANGE.	CHECK.	APPRO.
---------	------	-------	--	---------	--------	--------

单击下面可查看定价，库存，交付和生命周期等信息

[>>kinghelm\(金航标\)](#)