


# Kinghelm®

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

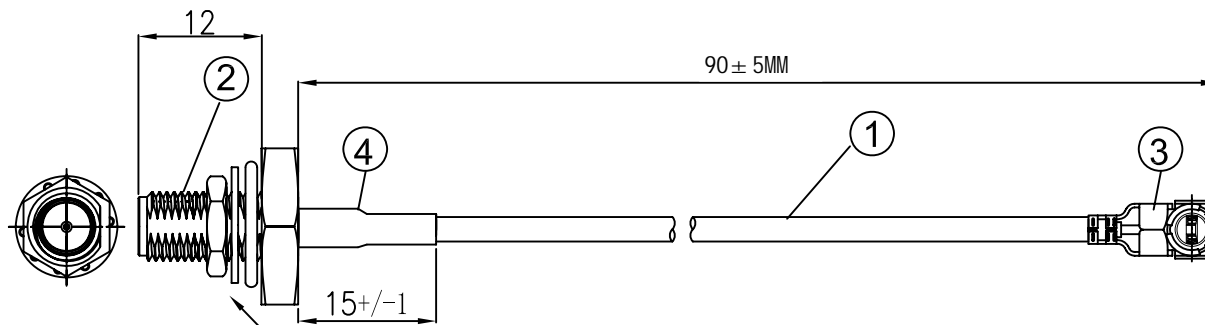

三個配件出貨時另外附配件出貨(防水圈, 華司, 螺母)

**NOTES:**

1. ELECTRICAL:
  - 1.1. VOLTAGE RATING:DCV 300V 10MS
  - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
  - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
  - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
  - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
2. MATERIAL:
  - 2.1. SEE TABLE
3. ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
4	套管	黑色热缩套管, OD:2.0MM	AS
3	端子	高仿I-PEX ,1.13端子, 镀金	1
2	接头	SMA防水母头母针, 分体, 11牙, 镀金	1
1	同轴线	RF 1.13灰色线,OD:1.13mm	AS

深圳市金航标电子有限公司      WWW.BDS666.COM  
 型号: KH-FS90-SMA11L      0755-83044319

ALL DIMENSION ARE IN MM	DRAWN Jamy	DATE 2018 /09 /24	I-PEX 1.13 TO SMA 11牙防水母头 L=90MM
COMPUTER GENERATED IN SOLIDWORKS	ENG.		
DO NOT SCALE THIS DRAWING	MFG.		
PROJECTION	Q.A.		
GENERAL TOLERANCE FOR ANGLES	X.X	X.XX	X.XXX
	± 1°	± 0.3	± 0.25 ± 0.150

CUSTOMER P/N:

SIZE Number	REV A
SCALE: Free	TYPE
SHEET 1 OF 1	

单击下面可查看定价，库存，交付和生命周期等信息

[>>kinghelm\(金航标\)](#)