


型号: KH-IPEX3-SMA-RG081-180mm

| REVISIONS | | | | | |
|-----------|--------|-------------|-----|-----|------|
| REV | NUMBER | DESCRIPTION | DWN | CHK | DATE |
| A | | DESIGN | | | |

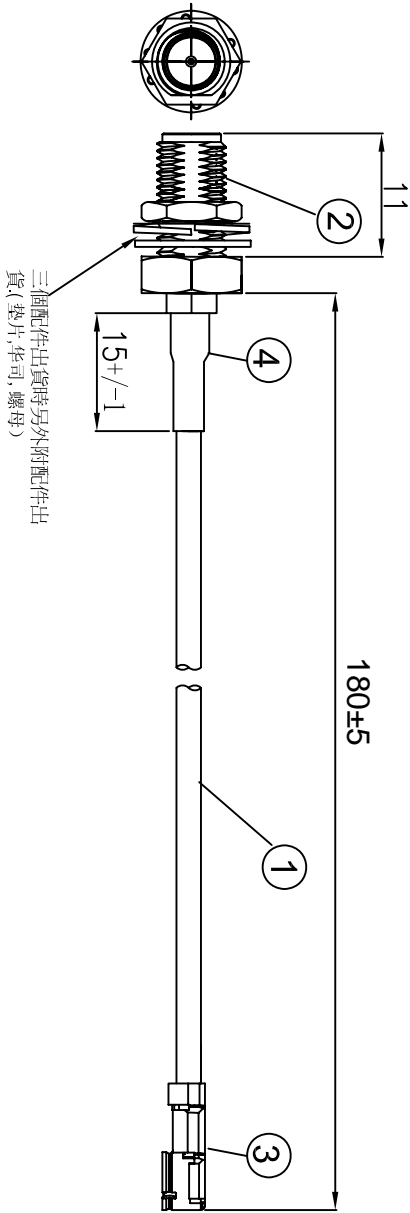


NOTES:

1. ELECTRICAL:
 - 1.1. VOLTAGE RATING:DCV 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE:3.0 OHMMAX.
 - 1.3. INSULATION RESISTANCE:5.0M OHM/MIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
2. MATERIAL:
 - 2.1. SEE TABLE
3. ALL COMPONENTS ARE ROHS COMPLIANT.

| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|----------|-------------|-----------------------------|------|
| ④ | 套管 | 黑色热缩套管, OD:2.0MM | AS |
| ③ | 端子 | 高仿IPEX 0.81 3代端子, 镀金 | 1 |
| ② | 接头 | SMA母头母针, 分体, 11牙, 镀金 | 1 |
| ① | 同轴线 | RF 0.81线材,颜色: 黑色, OD:0.81mm | AS |

金航标电子有限公司

| | | | | | |
|--|--|--------------|------------|---------------------------------|-----|
| ALL DIMENSION ARE IN MM | | DRAWN | DATE | I-PEX 0.81 3代 TO SMA /F L=180mm | |
| | | Janny | 2020-06-18 | | |
| COMPUTER GENERATED IN SOLIDWORKS | | ENG. | | | |
| DO NOT SCALE THIS DRAWING | | MFG. | | | |
| PROJECTION | | Q.A. | | | |
| GENERAL TOLERANCE FOR ANGLES ± 1° ± 0.3 ± 0.25 ± 0.150 | | | | | |
| SCALE: Free | | SIZE | Number | TYPE | REV |
| | | B | | | A |
| | | SHEET 1 OF 1 | | | |



技术详询

CUSTOMER P.N.:

单击下面可查看定价，库存，交付和生命周期等信息

[>>kinghelm\(金航标\)](#)