


REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

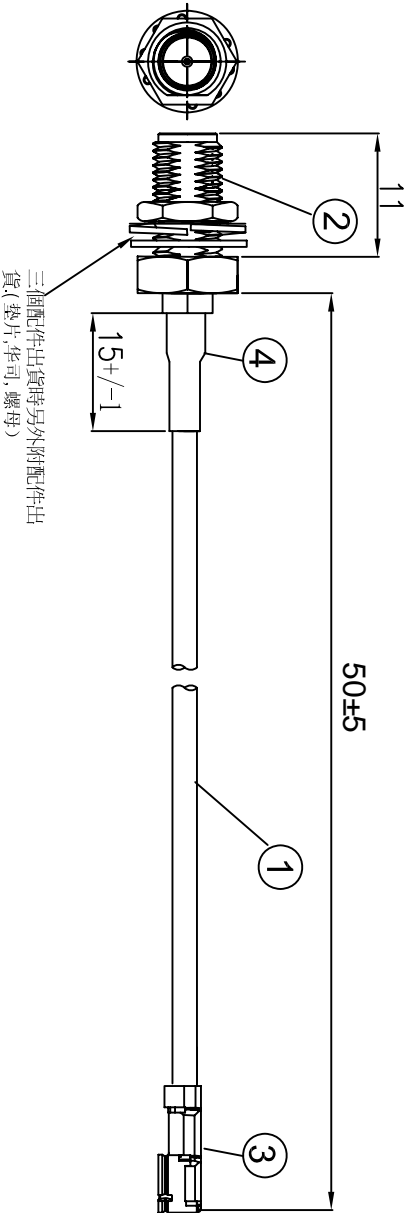

三個配件出貨時另外附配件出貨(墊片, 螺母)


NOTES:

1. ELECTRICAL:
 - 1.1. VOLTAGE RATING:DCV 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE:3.0 OHMMAX.
 - 1.3. INSULATION RESISTANCE:5.0M OHMMIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
2. MATERIAL:
 - 2.1. SEE TABLE
3. ALL COMPONENTS ARE ROHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	套管	黑色热缩套管, OD:2.0MM	AS
③	端子	高仿IPEX 0.81 4代端子, 镀金	1
②	接头	SMA母头母针, 分体, 11牙, 镀金	1
①	同轴线	RF 0.81线材,颜色: 黑色, OD:0.81mm	AS

金航标电子有限公司

ALL DIMENSION ARE IN MM		DRAWN	DATE	I-PEX 0.81 4代 TO SMA / F L= 50mm	
		Janny	2020-06-18		
COMPUTER GENERATED IN SOLIDWORKS		ENG.			
DO NOT SCALE THIS DRAWING		MFG.			
PROJECTION		Q.A.			
GENERAL TOLERANCE FOR ANGLES X.X ± 1° X.XX ± 0.3 X.XXX ± 0.25 X.XXXX ± 0.150					
SCALE: Free		SIZE	Number	REV	
		B		A	
		TYPE		SHEET	1 OF 1



技术详询

CUSTOMER P.N.:

单击下面可查看定价，库存，交付和生命周期等信息

[>>kinghelm\(金航标\)](#)