
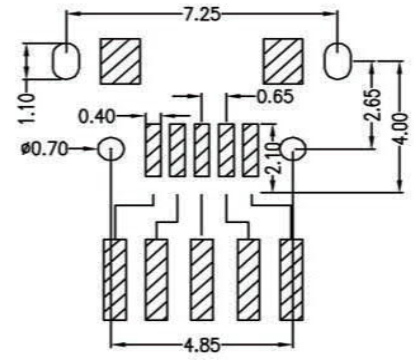



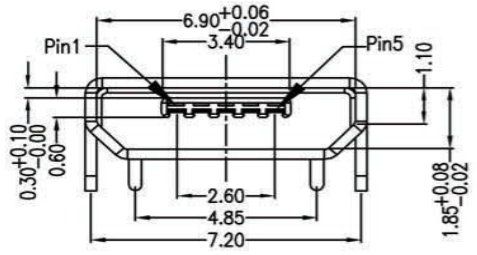
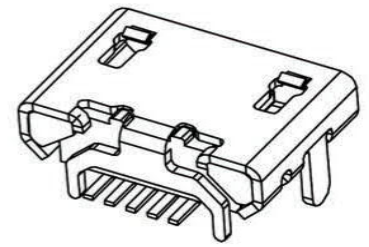


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE

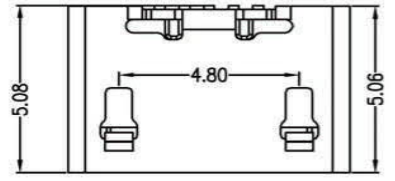

型号: KH-MICRO5P-JZH

Note:

1. Material:
 - 1.1 Housing: High temperature thermoplastic with g.f, UL94v-0
 - 1.2 Contact: copper alloy, t=0.15mm
 - 1.3 Shell: copper alloy, t=0.30mm
2. Specification:
 - 2.1 Current rating: 1 A Max.
 - 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - 2.3 Contact resistance: 50 mW Max.
 - 2.4 Insulation resistance: 100 MW Min.
 - 2.5 Total mating force: 3.57 Kgf Max.
 - 2.6 Total unmating force: 1.0 Kgf Min. 0.81~2.05 Kgf Min. after 10000 insertion/extraction cycles
 - 2.7 Temperature range: -30°C~80°C

A 01 S B X X X X X X X 1-067
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬

- | | | |
|--------------------------|---|-------------------------|
| ① 产品代号 A:成品 | ⑥ 外壳电镀 0:镀锌;1:Ni100μ";2:鍍Sn100μ";3:Ni+Au1μ"(銀);4:全Au1μ" | ⑪ 包装方式 1:吸盤管;2:卷帶;4:pe袋 |
| ② 产品系列 01:micro usb 5pin | ⑦ 端子材质 4:05191R-EH 2:C2680R-EH | ⑫ 下板类型 1:DIP |
| ③ 产品类别 S:母座 | ⑧ 端子电镀 0:鍍材;1:全Au1μ";2:全Au1.5μ";3:全Au2μ";4:全Au3μ";5:全Au5μ";6:全Au10μ";7:鍍Sn100μ";8:鍍Sn200μ";9:鍍Sn300μ";10:鍍Sn400μ";11:鍍Sn500μ" | |
| ④ 产品类型 B:B TYPE | ⑨ 主体材质 1:LCP | |
| ⑤ 外壳材质 1:C2680R-H | ⑩ 主体颜色 B:黑色 W:白色 | |

PART NO: A01SBXXXXXXX1-067		MATERIAL: SEE NOTE	金航标	WWW.BDS666.COM
MODEL NO: XX		FINSH: SEE NOTE	0755-83044319	
UNIT: MM	SIZE: A4	COLOR: SEE NOTE	TITLE: MICRO USB SS B TYPE 四脚全插(牛角型)短针	
TOLERANCE UNSPECIFIED		DR: 夏友红	DWG NO: A067	REV: A
.x	0.25	CHK:	SCALE: 5:1	DATE: 2012.05.02
.xx	0.15	APP:		
.xxx	0.10			
Ang.	2°			

单击下面可查看定价，库存，交付和生命周期等信息

[>>kinghelm\(金航标\)](#)