
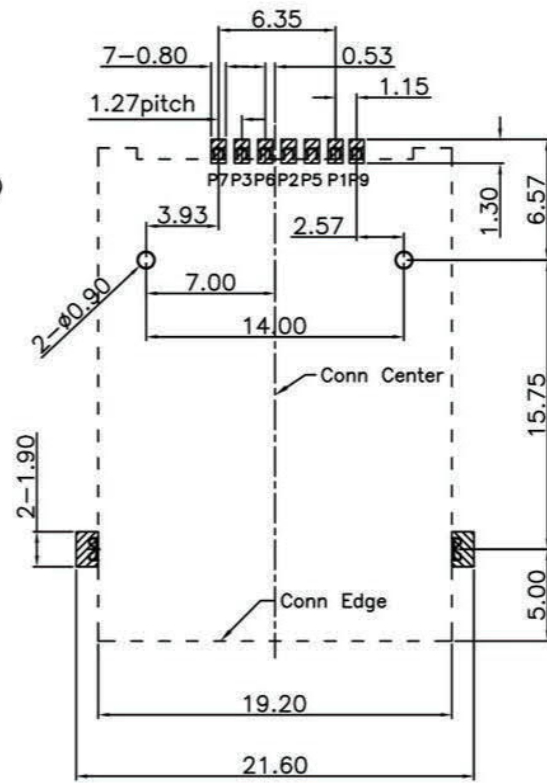
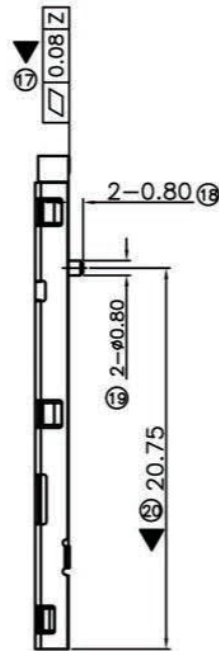


REV.	ECH.NO.	MODIFY.CONTENT	DATE
A0		NEW	2017/10/30

型号: KH-SIM1926-W

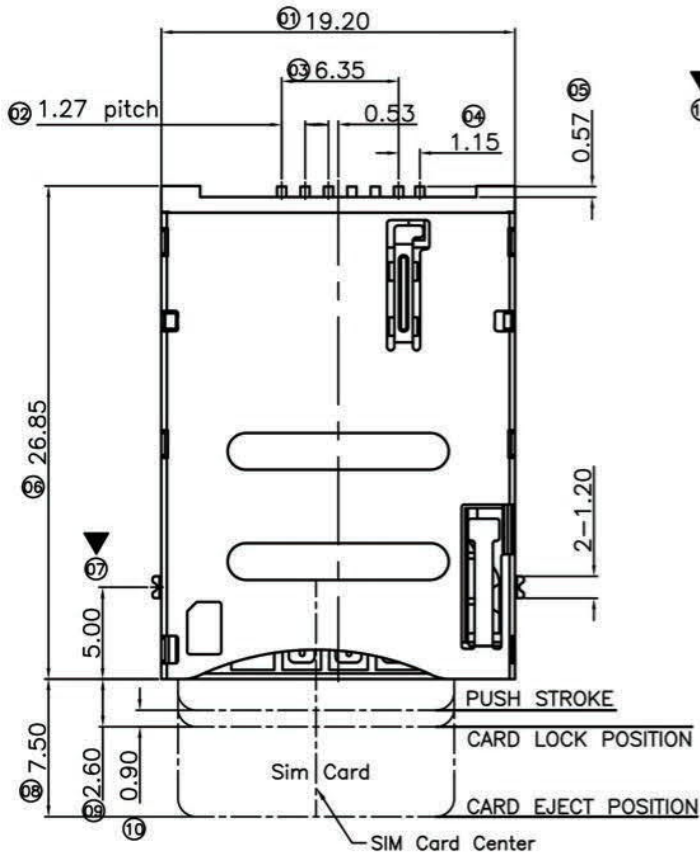

Specification:

***Electrical Characteristics:**
 Current Rating:0.5A
 Withstanding Voltage:AC500V r.m.s.
 Insulation Resistance:1000Megohms Minimum at DC 500V
 Contact Resistance:100Miliohms Maximum.

***Mechanical Characteristics:**
 Mating Cycles:5000 Insertions.

***Environmentl:**
 Operating Temperature:-40°To+60°



***Material:**
 1.Housing:HI-Temp plastic UL 94V-0 Rated.
 2.Contact:Copper Alloy.
 3.Shell:SUS.

***Finish :**
 1u" Gold plated on conatct area,100u"Min Tin plated on solder tails, Base Nickel :50u"Min


***Packing:**
 Number of connectors:750Pcs/REEL

***Measure:**
 ▼ Marked as the key test of QC and IPQC
 ⊙ Marked as FAI test size
 *PART NO.

PART NUMBER INFORMATION :

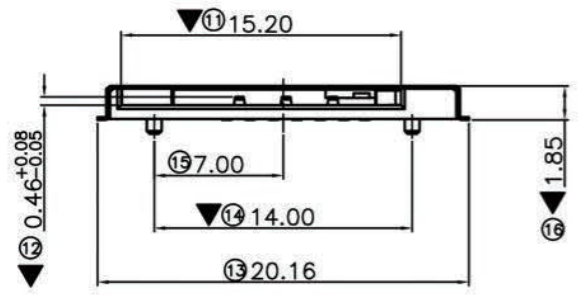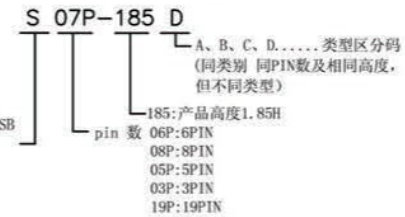

Connector terminal NO.	Pin NO.
Pin 1	VCC:PWR signal and GND
Pin 2	RST:Reset signal
Pin 3	CLK:Clocking signal
Pin 5	GND:PWR signal and GND
Pin 6	VPP:Porgramming Voltage
Pin 7	I/O:Serial date input/output

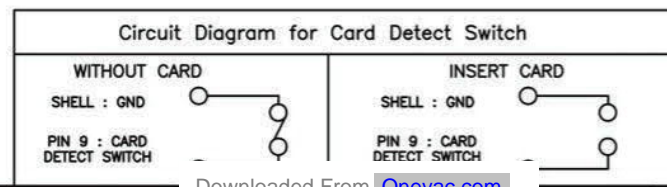

GENERAL TOLERANCE	DWG NO.	LZA0517-001	APPD:	Achilles	Scale	1:1
X.±0.20	x.'±5'	Title	CHKD:		UNIT	mm
.X±0.15	.x'±2'		DR:		Visual	↔
.XX±0.08	.xx'±1'	Part NO.	Date	2017/10/30	Edition	A0
.XXX±0.05	.xxx'±0.5'	深圳市金航标电子有限公司		WWW.BDS666.COM		
SHEET 1/1		0755-83044319				

单击下面可查看定价，库存，交付和生命周期等信息

[>>kinghelm\(金航标\)](#)