
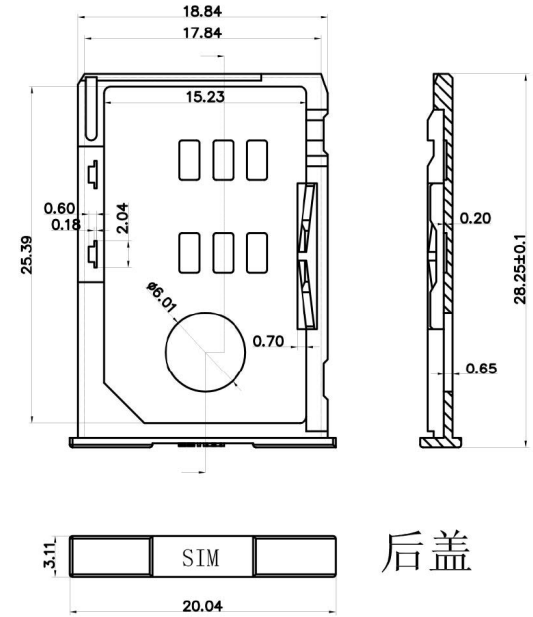


SPECIFICATIONS

Current Rating: 3Amps
 Insulator body: L C P
 Insulator Resistance: 5000Mw Min
 Dielectric Withstanding: DC 500V
 Contact Resistance: 20MW Max
 Durability: 100gf Cycls Min
 Contact Material: Copper alloy
 Finish : Tin Gold or Duplex plated
 Standard: Gold flash all over Nickel
 Operating Temperature: -55°C+105°C
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)


注明:带号码球的为检验尺寸,带▲为重要检验尺寸

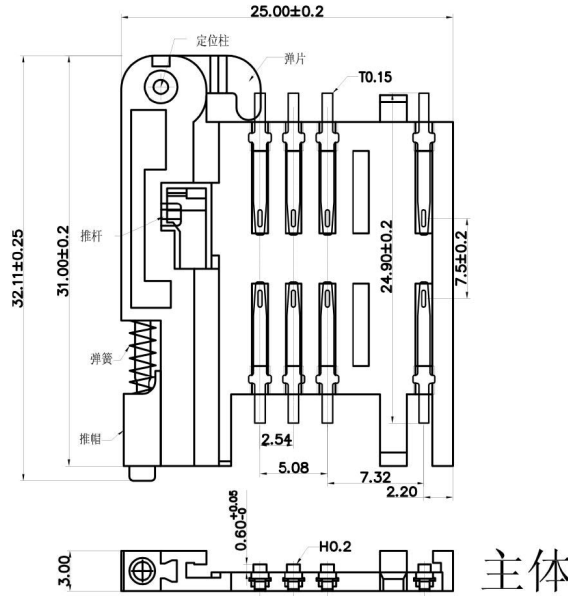

Ordering Information

7420 08 M S3 B T 04


No.of Pins Per Row 08=8P
 Connector Type S=Straight R=Right Angle M=SMT
 Contact Plating G0:Gold Flash G2:1.5U" Gold G3:2U" Gold G4:3U" Gold G5:5U" Gold S0:Gold Flash/Tin S3:5U"Gold Flash/Tin SN:Tin
 Insulator Color B=Black G=Grey

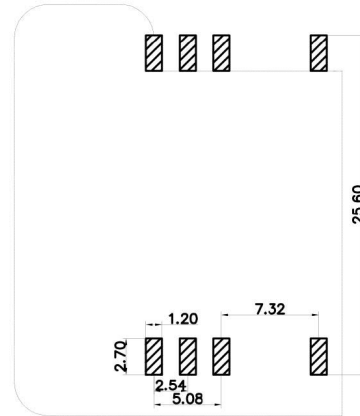

RECOMMEND P. C. BOARD LAYOUT

PCB TOLERANCE:±0.05 (TOP VIEW)

技术详询



型号: KH-SIM2-2.54-8F			OPERATION		DRAW	WZG	14.04.11	SCALE	FIT	深圳市金航标电子有限公司	
			X.X	±0.30	CHECK			UNIT	mm	PART NO. 742008MS3BT04	
			X.XX	±0.20				SIZE	A4	TITLE: A卡座 8P	
			X.XXX	±0.10				SHEET	1/1	客户料号:	
AO	2012.09.11	NEW DRAWING	Angle	±3°	APPROVE			PROJ.	◆		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL						

单击下面可查看定价，库存，交付和生命周期等信息

[>>kinghelm\(金航标\)](#)