


Kinghelm®

KHA(RG1.13)-TX50-IPEX

REV. NUMBER		DESCRIPTION		DWN	CHK	DATE
A		DESIGN		James		9/26

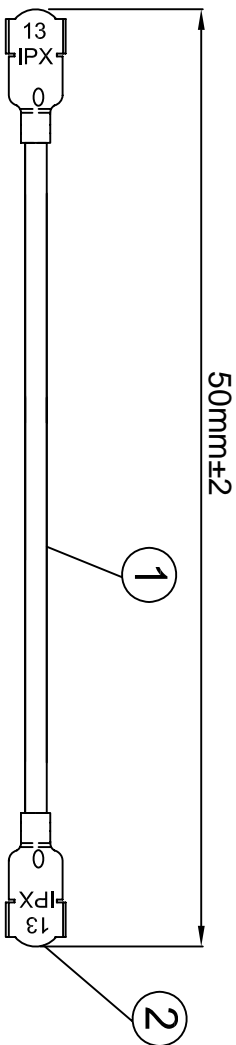

L1	50±1
L2	60±1
L3	120±1

- NOTES:
- ELECTRICAL:
 - VOLTAGE RATING:DCV 300V 10MS
 - CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - INSULATION RESISTANCE: 5.0M OHM/MIN.
 - THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
 - MATERIAL:
 - SEE TABLE
 - ALL COMPONENTS ARE ROHS COMPLIANT.

深圳市金航标电子有限公司

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
②	端子	高仿IPEX 1.13端子, 镀金	1
①	同轴线	RF1.13灰色同轴线, OD:1.13mm	AS

ALL DIMENSION ARE IN MM		DRAWN James	DATE 2019-06-01	TITLE IPEX TO IPE-X
COMPUTER GENERATED IN SOLIDWORKS DO NOT SCALE THIS DRAWING		CHKD. Frank	2019-06-01	SIZE DWG Number.
PROJECTION		APPD. Scott	2019-06-01	SCALE:Free
GENERAL TOLERANCE FOR ANGLES XX.XXX XXXX ±1° ±0.3				TYPE
				SHEET 1 OF 1

CUSTOMER PIN:

单击下面可查看定价，库存，交付和生命周期等信息

[>>kinghelm\(金航标\)](#)