


型号: KHB(GR178)-100-28

REV. NUMBER		REVISIONS	
REV	NUMBER	DESCRIPTION	DATE
A		DESIGN	

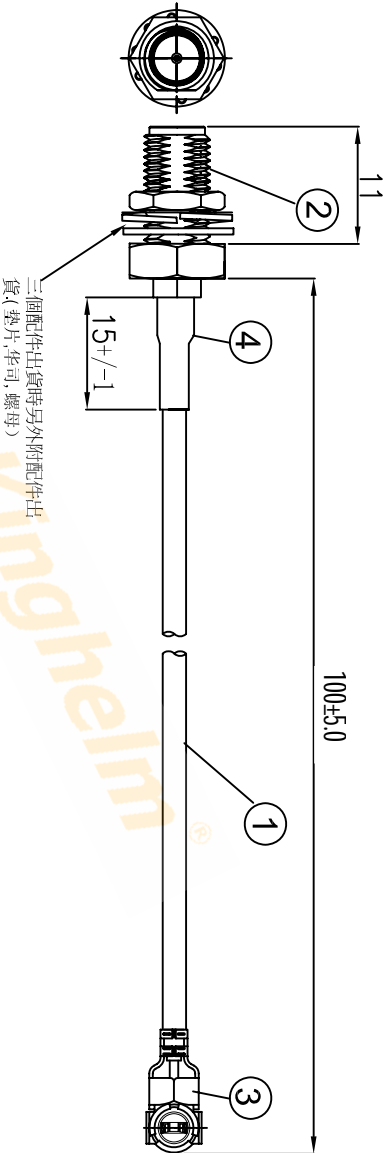

NOTES:

- ELECTRICAL:
 - VOLTAGE RATING:DCV 300V 10MS
 - CONDUCTANCE RESISTANCE: 3.0 OHMMAX.
 - INSULATION RESISTANCE: 5.0M OHMMIN.
 - THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - IT SHOULD BE NO ANY OPENS/SHORT, MISWIRING AND INTERMITTENT FAILURES
- MATERIAL:
 - SEE TABLE
- ALL COMPONENTS ARE ROHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	套管	黑色热缩套管, OD:2.0MM	AS
③	端子	高仿I-PEX, 1代端子, 镀金	1
②	接头	SMA母头母针, 分体, 11牙, 镀金	1
①	同轴线	Rg178棕色线, OD:1.80mm	AS

金航标电子有限公司

ALL DIMENSION ARE IN MM		DRAWN	DATE	I-PEX 178 TO SMA /F L=100MM	
		James	2019-06-01	SIZE	Number
COMPUTER GENERATED IN SOLIDWORKS		CHKD.	Frank	2019-06-01	B
DO NOT SCALE THIS DRAWING		Appd.	Scott	2019-06-01	REV
PROJECTION		GENERAL TOLERANCE FOR ANGLES		A	
		$\pm 1^\circ$ ± 0.3 ± 0.25 ± 0.150		SCALE: Free	

CUSTOMER P.N.:

单击下面可查看定价，库存，交付和生命周期等信息

[>>kinghelm\(金航标\)](#)