

4


3

2

1

Kinghelm®

REV. NUMBER		DESCRIPTION		DWN	CHK	DATE
A		DESIGN				

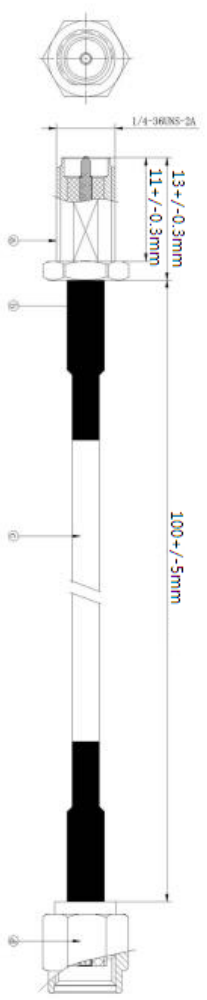

三個配件出貨時另外附配件出貨(2个华司，1个螺母)

cal loss => 0.1--0.3dbm

B

- NOTES:
- ELECTRICAL:
 - VOLTAGE RATING:DCV 300V 10MS
 - CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - INSULATION RESISTANCE: 5.0M OHM/MIN.
 - THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES
 - MATERIAL:
 - SEE TABLE
 - MECHANICAL:
 - SMA PULL FORCE: 12.0KGS.
 - ALL COMPONENTS ARE ROHS COMPLIANT.


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	套管	黑色热缩套管, OD: 4.0mm	AS
③	线损	01---0.3dbm	1
②	接头	SMA内螺内孔转外螺内针, 11牙镀金	1
①	同轴线	RG316 OD: 2.4MM	AS

金航标电子有限公司

型号: KHB (RG316) - SMA-100-28

RF CABLE SMA 300MM

A



技术详询

CUSTOMER PIN:

ALL DIMENSION ARE IN MM	DRAWN	DATE	TITLE
ARE IN MM	Janny	2018/05/04	型号: KHB (RG316) - SMA-100-28
COMPUTER GENERATED IN SOLIDWORKS	ENG.		
DO NOT SCALE THIS DRAWING	MFG.		
PROJECTION	Q.A.		
GENERAL TOLERANCE FOR ANGLES	± 1°	± 0.3	± 0.25 ± 0.150
SCALE: Free	TYPE	SHEET 1	OF 1

4

3

2

1

单击下面可查看定价，库存，交付和生命周期等信息

[>>kinghelm\(金航标\)](#)