

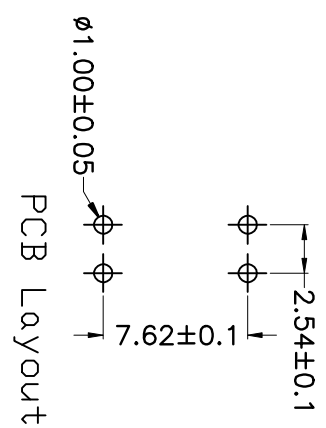
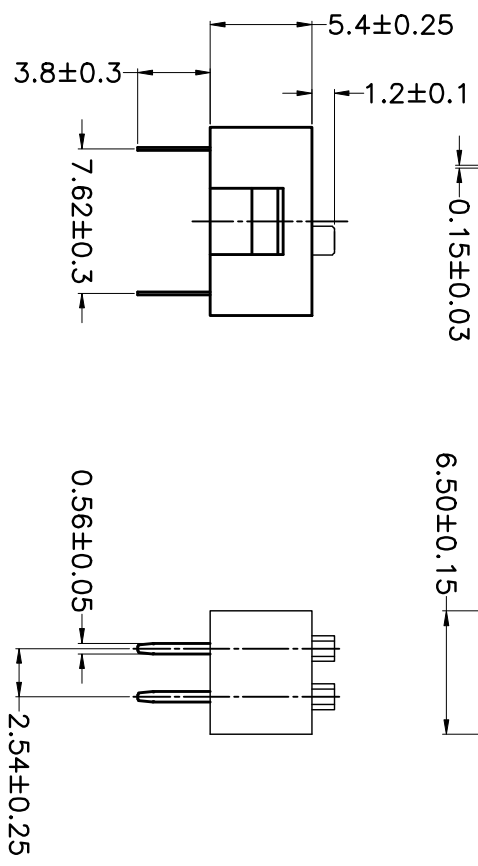


| | |
|----------------|-------------|
| PRODUCT NO. | DSWB02LHGFT |
| Rohs compliant | |

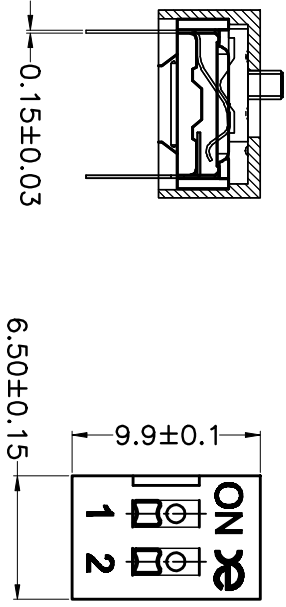

- Note:
- All dimensions are in millimeters.
 - General tolerance: $\pm 0.2\text{mm}$.
 - Material:


Base: UL94V-0 PBT Thermoplastic (Black).
 Cover: UL94V-0 PBT Thermoplastic (Black/Red/Blue).
 Actuators: UL94V-0 PA66 Thermoplastic (White).
 Contact plating: Gold plating over nickel.
 Pitting material: Epoxy.

4. Electrical
 Electrical: 2000 Operations per switch 24/VDC, 25mA.
 Non-Switching Rating: 100mA, 50/VDC.
 Switching Rating: 25mA, 24/VDC
 Contact Resistance: 100 mΩ Max at initial.

5. Mechanical
 Mechanical life: 2000 Operations per switch.
 Stroke: 2.0mm.
 Operation Temp: -20°C to 70°C.
 Storage Temp: -40°C to 85°C.

6. PART NUMBER DESCRIPTION:

DS WB 02 L H G E T

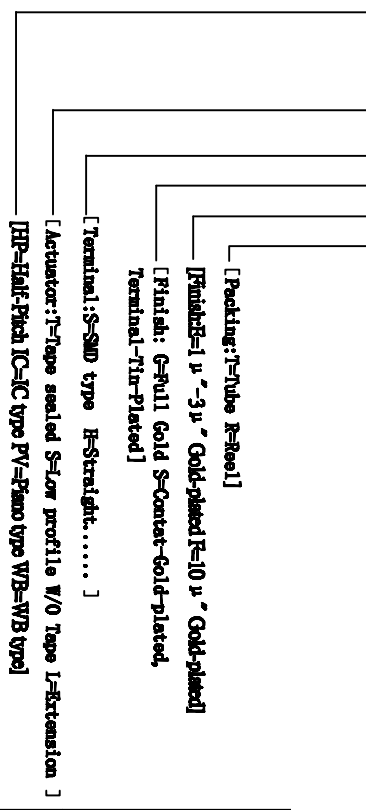

| | | | | | | | |
|--------------------------------------|-----------|-----------------|--------|------------|--|-----------------------------|--|
| TOLERANCE UNLESS OTHERWISE SPECIFIED | | INSPECTION COPY | | PROJECTION | | TITLE | |
| LINER | ANGLES | 0 ± 0.30 | 0 ± 1° | | | BY DSWB SERIES PITCH 2.54mm | |
| .00 ± 0.20 | .0 ± 0.5° | | | | | PRODUCT FAMILY DSWB SERIES | |
| .000 ± 0.10 | .00 ± | | | | | PRAT NO. DSWB02LHGFT | |
| DESIGN | LU ER XIN | 2013/07/02 | | | | FILE NO. DSWB02LHGFT-A | |
| DRAWING | | | | | | SIZE UNIT SCALE SHEET REV. | |
| CHECK | | | | | | A4 mm FIT TOP 1 A | |
| APPRO. | | | | | | | |



单击下面可查看定价，库存，交付和生命周期等信息

[>>KINGTEK\(广督\)](#)