
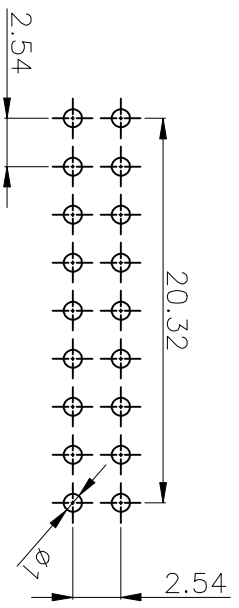
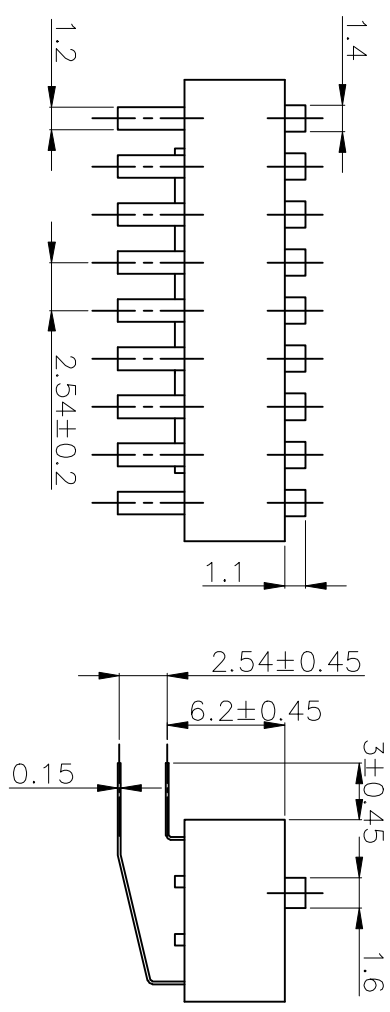


PRODUCT NO.	DSDA09LHGET
RoHS compliant	

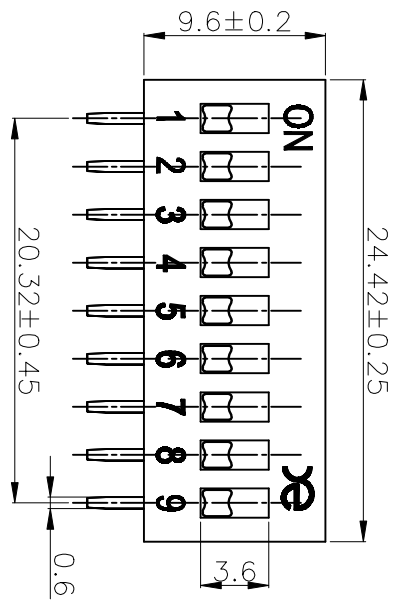

**P.C.B LAYOUT**

- Note:**
1. All dimensions are in millimeters.
  2. General tolerance:  $\pm 0.2\text{mm}$ .
  3. Material:

- Base: UL94V-0 PBT Thermoplastic (Black).
- Cover: UL94V-0 PBT Thermoplastic (Black/Red/Blue).
- Actuators: UL94V-0 PA66 Thermoplastic (White).
- Contact plating: Gold plating over nickel.
- Pitting material: Epoxy.

4. Electrical
  - Electrical: 2000 Operations per switch 24/VDC, 25mA.
  - Non-Switching Rating: 100mA, 50/VDC.
  - Switching Rating: 25mA, 24/VDC
  - Contact Resistance: 100 mΩ Max. at initial.
5. Mechanical
  - Mechanical life: 2000 Operations per switch.
  - Stroke: 2.0mm.
  - Operation Temp: -20°C to 70°C.
  - Storage Temp: -40°C to 85°C.

**6. PART NUMBER DESCRIPTION:**

DS DA XX L H G E I

- [Packing: T-Tube R-Seal]
- [Finish: 1 μ " 3 μ " Gold-plated R=10 μ " Gold-plated]
- [Finish: 6-Full Gold S-Contact-Gold-plated, Terminal-Tin-Plated]
- [Terminal: S-SMD type H=Straitght.....]
- [Actuator: T-Tape sealed S=I/or profile W/O Tape L=Extension]
- [HP=Half-Pitch IC=IC type PV=Plano type WB=WB type]

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION	
LINE	ANGLES	QRT	PROJECTION
0 ± 0.40	0 ± 1°		
.00 ± 0.30	.0 ± 0.5°		
.000 ± 0.20	.00 ±		
DRAWING	DATE	DESIGNER	APPVAL
	2013/07/02		
TITLE		BY DSDA SERIES PITCH 2.54mm	
PRODUCT FAMILY		DSDA SERIES	
PART NO.		DSDA09LHGET	
DRAWING		DSDA09LHGET-1	
FILE NO.	UNIT	SCALE	SHEET
A4	MM	1:1	1 OF 1

**东莞市广普实业有限公司**  
Dongguan Kingtek Industrial Co., Ltd.

单击下面可查看定价，库存，交付和生命周期等信息

[>>KINGTEK\(广督\)](#)